

The Meter Setter



A QUICK AND EASY WAY TO CONVERT A PLAIN END PIPE
TO A RESTRAINED FLANGE CONNECTION.

RESTRAINED FLANGE ADAPTER



RFAD

(Flange x Restraint
for Ductile Iron Pipe)



LISTED
547U



RFAP

(Flange x Restraint
for PVC, Steel or
DR35 Sewer Pipe)



◁FM▷Approved
4" - 12"

Looking for an easy way to convert a plain end pipe to a restrained flange connection? Look to the Ford Restrained Flange Adapter. Designed with the UFR1400 or UFR1500 restraints *AND* the SO-EZ gasket, these restrained adapters provide a true stab-fit. The restraint gland is furnished with actuating screws designed to twist off at the correct installation torque.

The design and flexibility of the 4" through 12" SO-EZ gasket maintains alignment of the pipe and coupling on a wide range of pipe ODs.


Features such as two closed starter lugs,

bolt-stops on the center sleeve, and the SO-EZ gasket make the restrained adapter easy to install with no disassembly required.

Available in sizes 3" through 12", these epoxy coated adapters are made with high quality ductile iron and corrosion resistant, high strength, low alloy steel rods and nuts.

Ford's Restrained Flange Adapter is UL listed and FM Approved in sizes 4" through 12".

For additional information on this or any other Ford product, contact your local Ford Distributor or The Ford Meter Box Company.

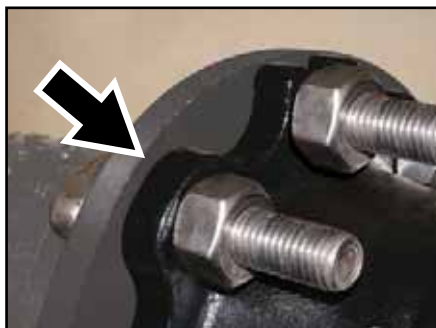

Flange end has two closed **starter lugs**. This allows the adapter to remain in position while assembling the remaining flange bolts.



Bolt-stop prevents tee-head bolt from turning during installation.



The Ford Meter Box Co., Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443
Telephone: 260/563-3171 FAX: 1-800-826-3487 Overseas FAX: 260/563-0167 <http://www.fordmeterbox.com>