



The Ford® Uni-Ring

Product Announcement

06/2018

Ford Meter Box has released a mechanical joint ring restraint, the Uni-Ring. The Uni-Ring consists of a restraint gland, restraint ring, optional spacer ring and gasket to easily connect mechanical joint fittings to plain end pipe. The Uni-Ring saves time by eliminating actuating screws. The hardened, serrated restraint ring is engaged by the gland and moved into position by the T-head bolts, with no more effort than installing an MJ gland. Available in sizes 4"-12", the Ford Uni-Ring is suitable for ductile iron and C900 PVC. Adding the exclusive Ford spacer ring allows the Uni-Ring to be used on the most challenging pipe types, like thin wall PVC pipe (DR25 or greater), HDPE and C909 PVCO.




Designed for:


- C900
- Ductile Iron
- C909
- HDPE (when used with insert stiffener)

Size	Pipe OD	Part Number	Weight (lbs.)
4"	4.80	FUR-C-4-I	9
6"	6.90	FUR-C-6-I	12
8"	9.05	FUR-C-8-I	15
10"	11.10	FUR-C-10-I	21
12"	13.20	FUR-C-12-I	24

Includes gland, restraint ring, spacer, MJ gasket, T-bolts and nuts

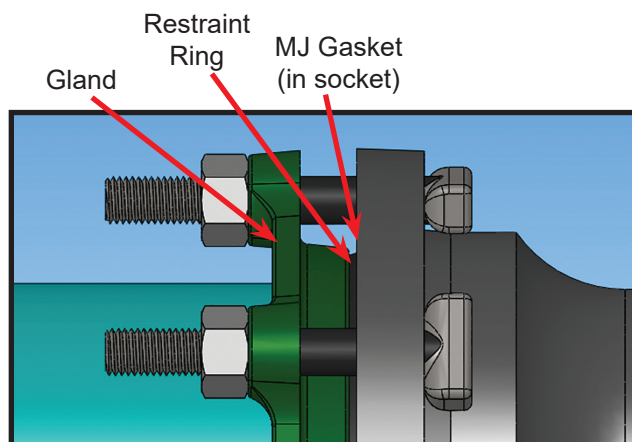

View when installed on ductile iron or C900

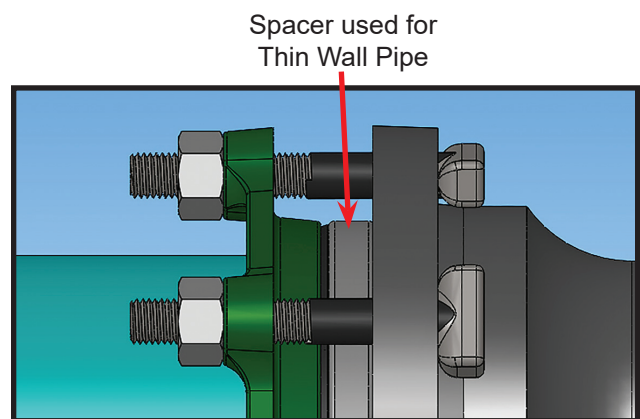

View when installed on thin walled PVC or PVCO

The Ford Meter Box Company, Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 www.fordmeterbox.com

UNI-RING