



# No-Contact Coupling

(Patent Pending)

## Product Release


05/2017

Ideal for connecting existing lead plumbing lines to other service line materials, the No-Contact Lead-Pak Coupling prevents direct contact of the lead plumbing line with other metallic water system components. This design mitigates the possibility of galvanic corrosion.

No-Contact Lead-Pak compression couplings employ proven Pack-Joint performance and complement Ford's extensive line of waterworks coupling solutions.



Cut-away View

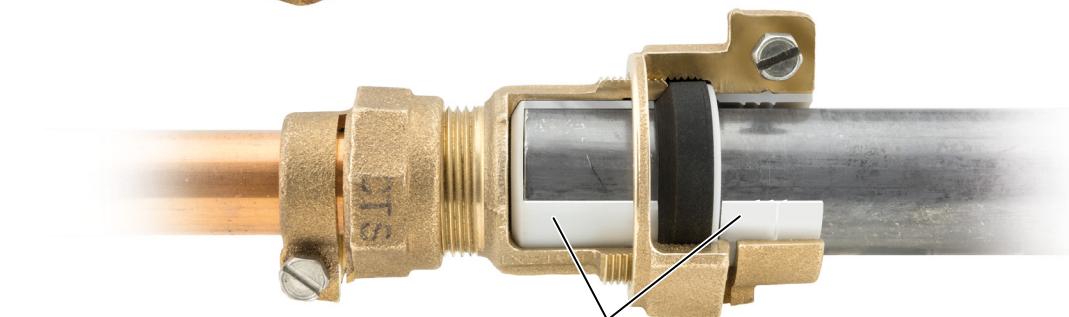

Permanently installed plastic gripper ring and sleeve liner prevent direct contact between lead pipe material and other metallic water system components

CATALOG NUMBER	DESCRIPTION		
* Q11-33-Q31-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" female iron pipe thread
* Q14-33-Q34-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" cop. or plastic tubing (CTS)
* Q18-33-Q38-23-NC-NL	5/8" dbl. extra strong lead (XXS) or 3/4" strong lead (S)	x	3/4" male iron pipe threads
Q22-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" flare copper
Q22-34-NC-NL	3/4" extra strong lead (XS)	x	1" flare copper
Q24-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" cop. or plastic tubing (CTS)
Q24-34-NC-NL	3/4" extra strong lead (XS)	x	1" cop. or plastic tubing (CTS)
Q28-33-NC-NL	3/4" extra strong lead (XS)	x	3/4" male iron pipe threads
Q21-44-NC-NL	1" extra strong lead (XS)	x	1" female iron pipe thread
Q22-44-NC-NL	1" extra strong lead (XS)	x	1" flare copper
Q24-44-NC-NL	1" extra strong lead (XS)	x	1" cop. or plastic tubing (CTS)
Q28-44-NC-NL	1" extra strong lead (XS)	x	1" male iron pipe threads

\*These items fit two types/sizes of lead pipe as shown in the description.

**The Ford Meter Box Company, Inc.** 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443  
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 [www.fordmeterbox.com](http://www.fordmeterbox.com)