




FC1/FC2A Couplings

Product Bulletin

03/2023

Stay Connected with Ford® Couplings

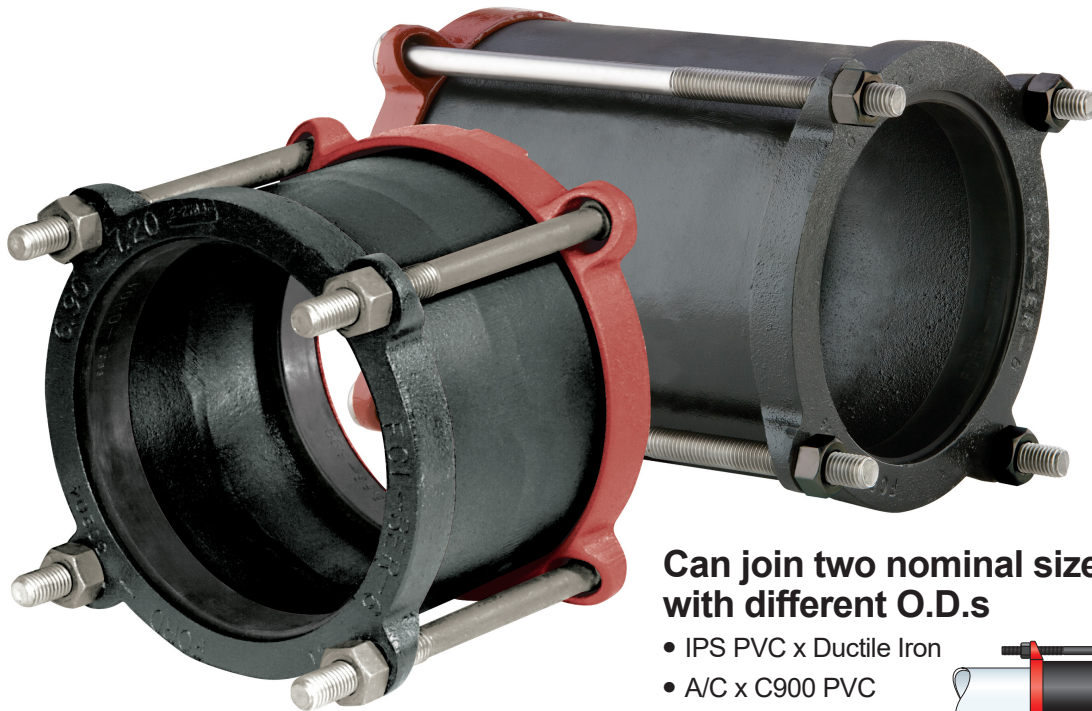


Can join two nominal size pipes with different O.D.s


- IPS PVC x Ductile Iron
- A/C x C900 PVC
- IPS PVC x IPS PVC




Typical Uses for Ford Cast Couplings




To repair split pipe



To couple different types of pipe



To install (cut-in) hydrants and valves

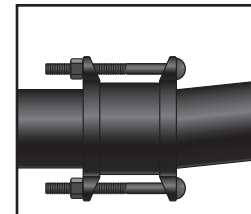

To connect misaligned pipe per AWWA C219

Features:

- High-quality ductile iron ASTM A536, Grade 65-45-12 or carbon steel per ASTM A36
- SBR rubber gasket per ASTM D2000 (Optional NBR (Buna-N) or EPDM gaskets)
- End rings are color-coded for easy identification
- Bolts and nuts are high-strength low alloy per ASTM A242 and AWWA C111 (Optional blue fluorocarbon coating or stainless steel)
- Select sizes available in 12" length
- Rated working pressure up to 300 psi for FC1 2" - 12", 250 psi for FC2A 2" - 12", and 150 psi for FC2A 14" - 24".
- Shop coat finish (optional epoxy coating)
- Certified to ANSI/NSF Standard 61



The Ford Meter Box Co., Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 www.fordmeterbox.com