




# Meter Coupling Check Valves

Product Release


05/2015

## Check This Out!

Ford Meter Couplings with concealed integral check valves stop backflow to the water line by preventing reverse water flow when removing a meter. These couplings are especially useful in retrofit projects, or in tight spaces where a conventional check valve wouldn't typically fit.

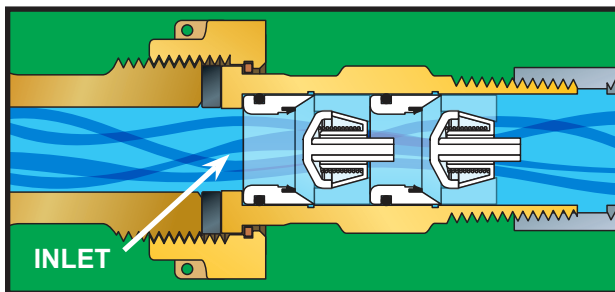

Positive inlet water pressure - check valves open

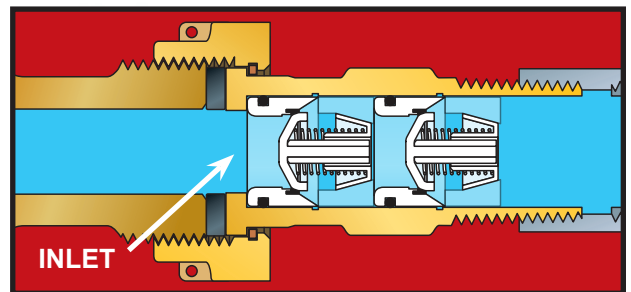

Negative inlet water pressure - check valves close

### Features:

- Available with single or dual integral check valves
- Check cartridges can be removed and replaced for maintenance
- 150 psi working pressure
- Composed of waterworks brass compliant with AWWA C800 and latest revisions
- Ideal for retrofit or new metering applications

### Ordering Information

Catalog Number	Meter Size	Number of Check Cartridges	Overall Length	Approx. Wt. Lbs.
C38-23H1-2-5-NL	5/8" x 3/4" or 3/4"	1	2-1/2"	0.6
C38-23H2-2-5-NL	5/8" x 3/4" or 3/4"	2	2-1/2"	0.6
C38-44H1-2-625-NL	1"	1	2-5/8"	0.8
C38-44H2-3-NL	1"	2	3"	1.0

**The Ford Meter Box Company, Inc.** 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443  
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 [www.fordmeterbox.com](http://www.fordmeterbox.com)

FMCCV