




UFR2800 AND UFR2850

Product Release


04/2013

Tandem Restraints for Ductile Iron Pipe *FOR HIGH PRESSURE APPLICATIONS*

Used in tandem, the UFR2800 allows two UFR1400 restraints to work in unison to hold higher pressures. Available as a standard restraint (UFR2800) or with a back-up ring for bell and spigot connections (UFR2850).

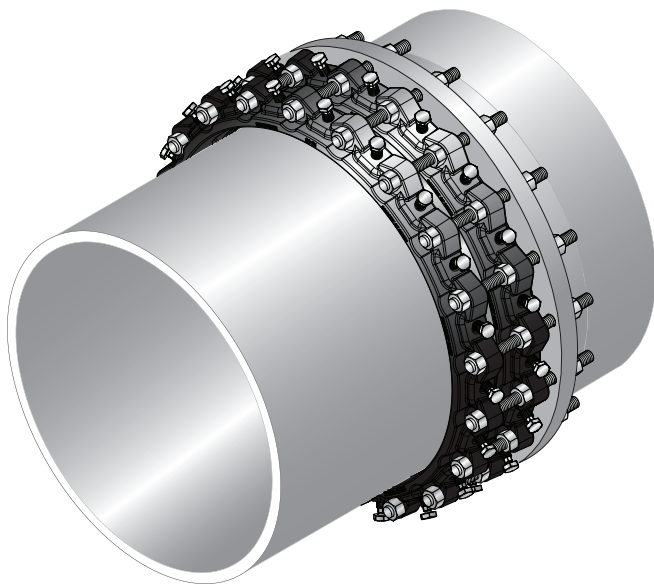

UFR2800 for
Standard Mechanical Joint Connections

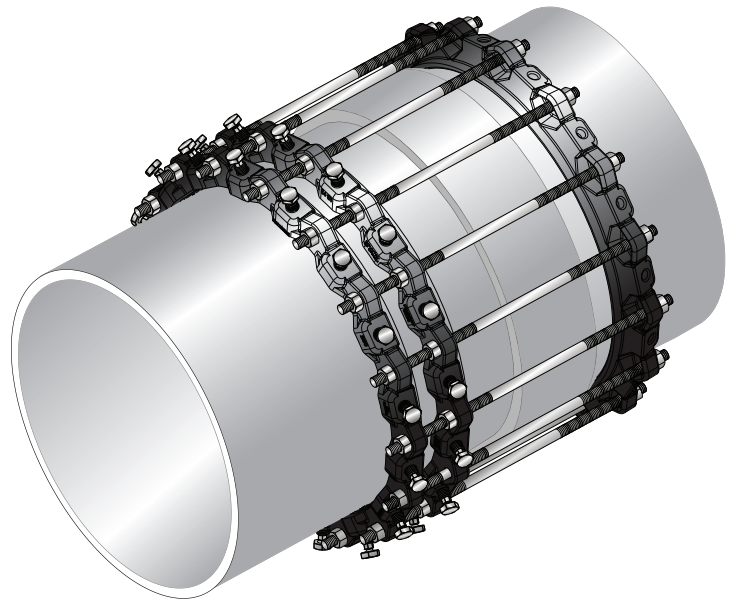

UFR2850 for
Bell and Spigot Connections

Features:

- Available in sizes 3" through 36"
- Pressure rating: 3" - 12" 500 PSI
 14" - 16" 450 PSI
 18" - 36" 350 PSI
- Ductile iron wedge actuating screw with Auto-Tork break-away head design ensures proper torque during installation
- Gland, wedge and actuating screws are ductile iron per ASTM A536, Grade 65-45-12 and epoxy coated via the e-coat process
- Available in a domestic or imported casting

The Ford Meter Box Company, Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443

Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 <http://www.fordmeterbox.com>

FUFR2800