

C909/C907 RESTRAINT SOLUTIONS

Uni-Flange® restraints offer the fastest, most economical, and reliable method of restraining C909 pipe with our UFR13x9 Series. All styles feature ductile iron components in sizes 4" through 12" and fabricated steel components in sizes 10" through 18". Clamping pads and tie rod lugs are located for ease of installation, and all ductile iron components are Armorguard e-coated for superior corrosion resistance. For additional information on these, or any other Ford product, contact your local Ford Distributor or Ford Meter Box.


UFR1309* - FOR MECHANICAL JOINT FITTINGS



UFR1369 - FOR C907 ELLS, TEES, AND PVC PRESSURE FITTINGS



UFR1399* - FOR BELL AND SPIGOT CONNECTIONS

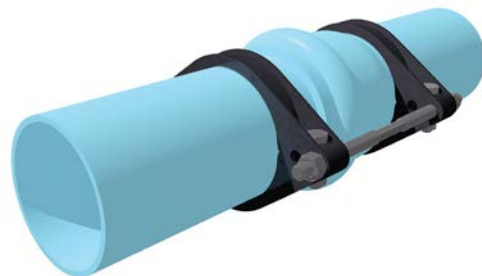

* FM Approved on C909 in sizes 4" - 8"



The Ford Meter Box Co., Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 www.fordmeterbox.com