



SUBMITTAL INFORMATION

Angle Key Service Valves - (AV41-xxxW-U-AWT-NL style)



ULTRA-TITE FOR COPPER OR PLASTIC TUBING (CTS) INLET BY FEMALE IRON PIPE THREAD OUTLET, ASSEMBLED WATERTIGHT

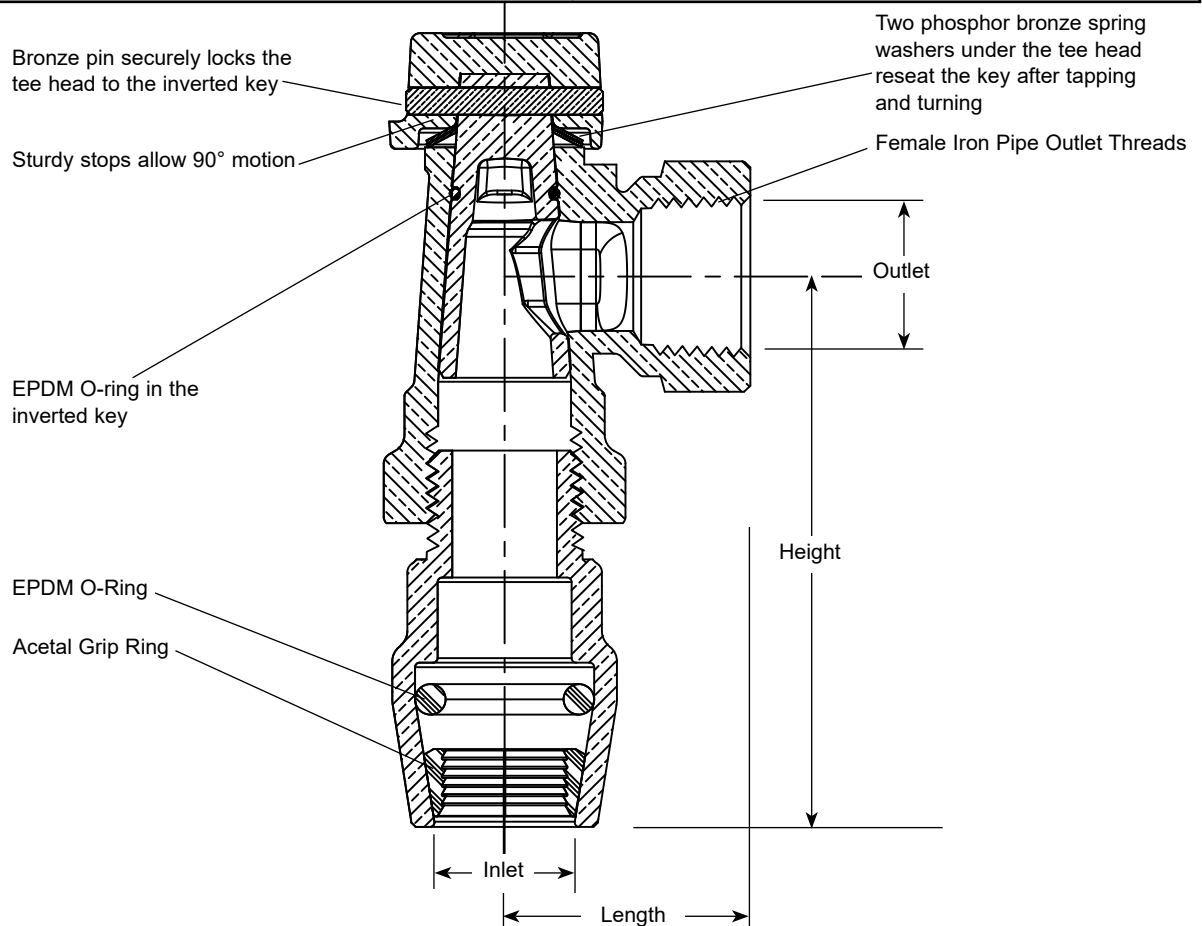

DESCRIPTION		ULTRA-TITE INLET O.D. RANGE (INCHES)	OUTLET SIZE	LENGTH	HEIGHT	APPROX. WT. LBS.	PART NUMBER	✓ SUBMITTED ITEMS
VALVE SIZE	ULTRA-TITE INLET SIZE							
3/4"	3/4"	0.871 - 0.879	3/4"	1-11/16"	3-25/32"	2.5	AV41-333W-U-AWT-NL	
1"	1"	1.120 - 1.130	1"	1-23/32"	4-9/32"	3.2	AV41-444W-U-AWT-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Meets 100 PSI working pressure requirement of AWWA Standard C800
- Ends are integral or secured with adhesive to prevent unintentional disassembly

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

05/09/19

Submitted By: