



SUBMITTAL INFORMATION

Angle Ball Meter Valves - (BA13-xxxSLB-NL style)



FEMALE IRON PIPE THREAD INLET BY METER SWIVEL NUT OUTLET WITH SECURA-LOK™

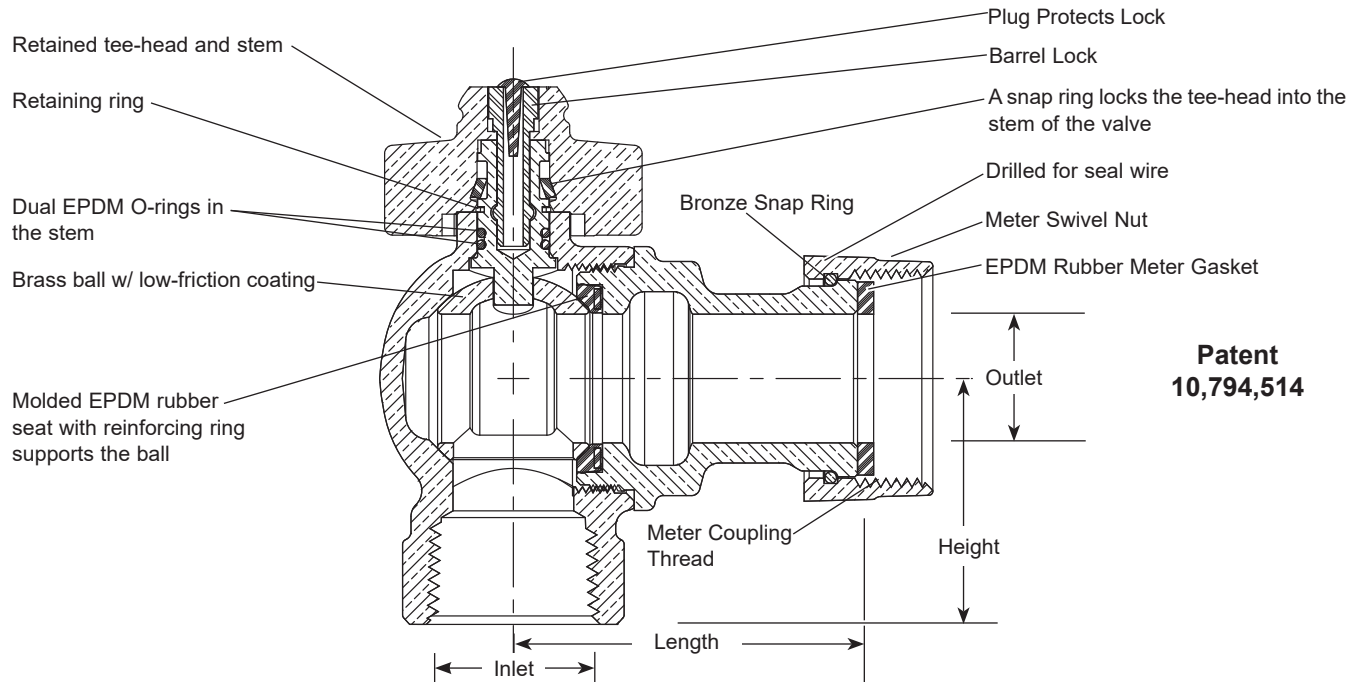

**Patent
10,794,514**

Due to design variations related to sizing, items may differ from images above.

VALVE SIZE	SERVICE LINE SIZE	METER SIZE	LENGTH (IN.)	HEIGHT (IN.)	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	5/8" x 3/4" & 3/4"	2-9/32	1-39/64	2.0	BA13-332SLB-NL	
3/4"	3/4"	1"	1-63/64	1-39/64	2.2	BA13-334SLB-NL	
1"	1"	1"	2-43/64	1-29/32	2.6	BA13-444SLB-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Secura-Lok™ allows locking in the open, closed or operational position
- 300 PSI working pressure
- Conforms to AWWA C700 for meter threads
- Key-234-SLB (order separately) required for lock operation

Note: Recommended for inlet side shut-off.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/26/24

Submitted By: