



SUBMITTAL INFORMATION

Angle Ball Yoke Valves - (BA94-2xxW-NL style)



PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER YOKE NOSE OUTLET

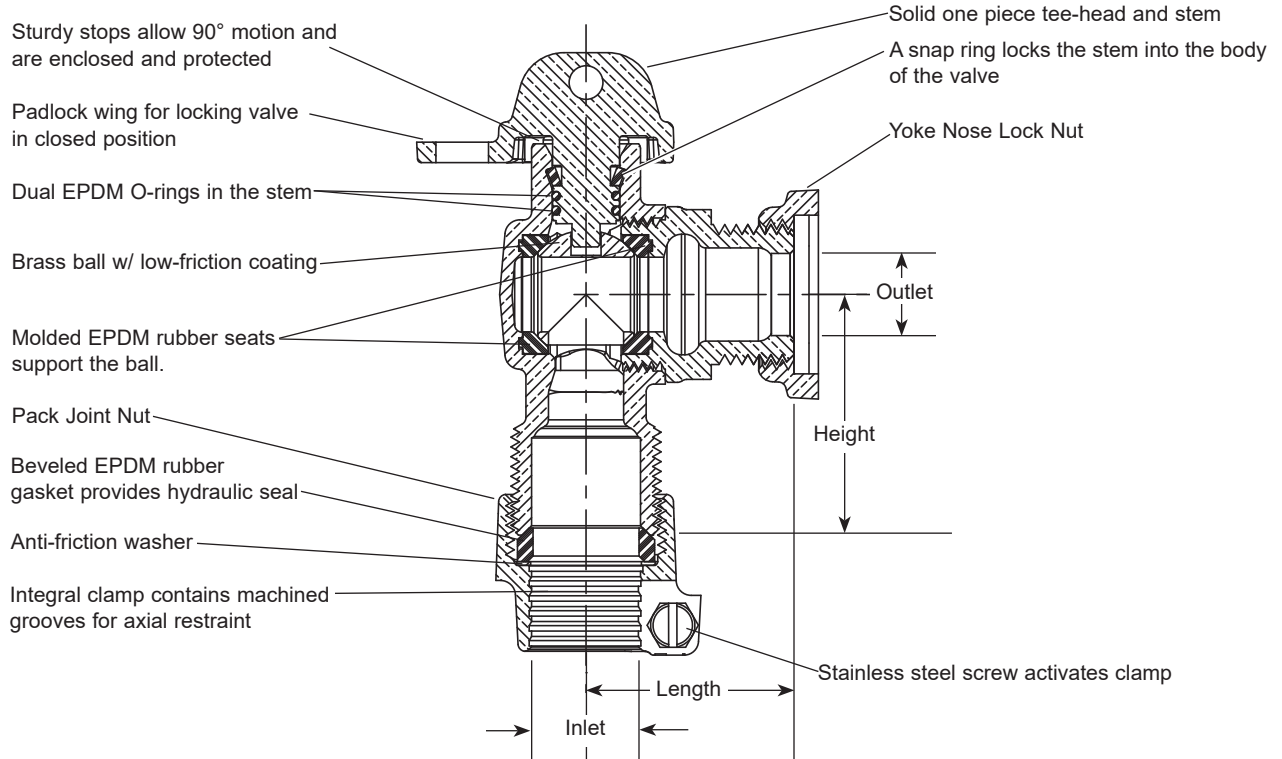

Due to design variations related to sizing, items may differ from images above.

VALVE SIZE (IN.)	INLET SIZE (IN.)	OUTLET SIZE (IN.)	LENGTH (IN.)	HEIGHT (IN.)	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
5/8	3/4	5/8	1-3/4	2	1.5	BA94-213W-NL	
5/8	1	5/8	1-5/8	1-7/8	1.6	BA94-214W-NL	
5/8	3/4	5/8 x 3/4 & 3/4	1-3/4	2	1.5	BA94-223W-NL	
5/8	1	5/8 x 3/4 & 3/4	1-5/8	1-7/8	1.6	BA94-224W-NL	

Note: Ford recommends insert stiffeners when using plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI/CAN Standard 61 and NSF/ANSI/CAN Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- 300 PSI working pressure
- Padlock wing for locking valve in closed position
- EPDM rubber yoke nose gasket sold separately: GT-112 (5/8"), GT-118 (3/4") and GT-123 (1")

Note: Recommended flow from inlet to outlet

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/22/24

Submitted By: