
SUBMITTAL INFORMATION

Fabricated Two-Bolt Coupling - (BOAL-x style)



BOALINQ™ TWO-BOLT COUPLING FOR JOINING SAME NOMINAL SIZED STEEL, DUCTILE IRON, HDPE, PVC, PVCO, CAST IRON AND A/C PIPES

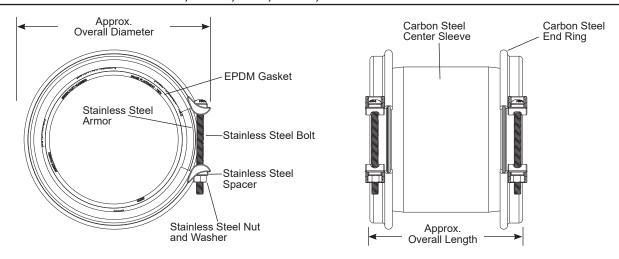

Nominal Pipe Size (In.)	CATALOG NUMBER	TOTAL RANGE (IN.)	RANGE WITH INNER GASKET (IN.)	Range w/o Inner Gasket (In.)	APPROX. OVERALL LGTH. (IN.)	APPROX. OVERALL DIA. (IN.)	SLEEVE THICKNESS (IN.)	APPROX WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
4	BOAL-4	4.25 - 5.63	4.25 - 5.00	4.92 - 5.63	9.4	11.1	0.17	16	
6	BOAL-6	6.42 - 7.68	6.42 - 7.05	7.01 - 7.68	11.6	12.7	0.17	24	
8	BOAL-8	8.54 - 9.84	8.54 - 9.17	9.13 - 9.84	11.6	14.8	0.17	30	
10	BOAL-10	10.70 - 12.00	10.70 - 11.37	11.33 - 12.00	11.6	17	0.17	35	
10 Over Sized	BOAL-10-OS	10.96 - 12.26	10.96 - 11.63	11.59 - 12.26	11.6	17.1	0.17	35	
12	BOAL-12	12.40 - 13.66	12.40 - 13.03	12.99 - 13.66	11.6	18.5	0.17	39	
12 Over Sized	BOAL-12-OS	13.15 - 14.41	13.15 - 13.78	13.74 - 14.41	11.6	19.25	0.17	41	

^{*} Insert stiffeners are required for use on HDPE pipe

FEATURES

- Center Sleeve Grade A steel per ASTM A53
- End Rings Grade C steel per ASTM A283 / A283M
- Gaskets EPDM rubber per ASTM D2000
- Armors Type 316 stainless steel per ASTM A240
- Spacers for Bolts and Nuts Type 316 stainless steel per ASTM A240
- Bolts and Nuts Type 316 stainless steel per ASTM A193 and A194 with anti-friction coating
- Washers Type 316 stainless steel per ASTM A193 and A194
- Coating NSF 61 approved e-coat epoxy base with NSF 61 approved black fusion bonded epoxy topcoat
- Rated working pressure 260 psi
- Maximum allowable deflection 4° per side
- Minimum pipe insertion 2.25" each side
- Certified to NSF/ANSI 61
- Dual gaskets with removable, replaceable inner gasket provide greater range.
- Includes lifting strap

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

07/30/24