



SUBMITTAL INFORMATION

Straight Meter Coupling - (C38-xxHCR2-x-NL style B)



METER SWIVEL NUT BY MALE IRON PIPE THREAD WITH INTEGRAL CHLORAMINE RESISTANT DUAL CHECK VALVE

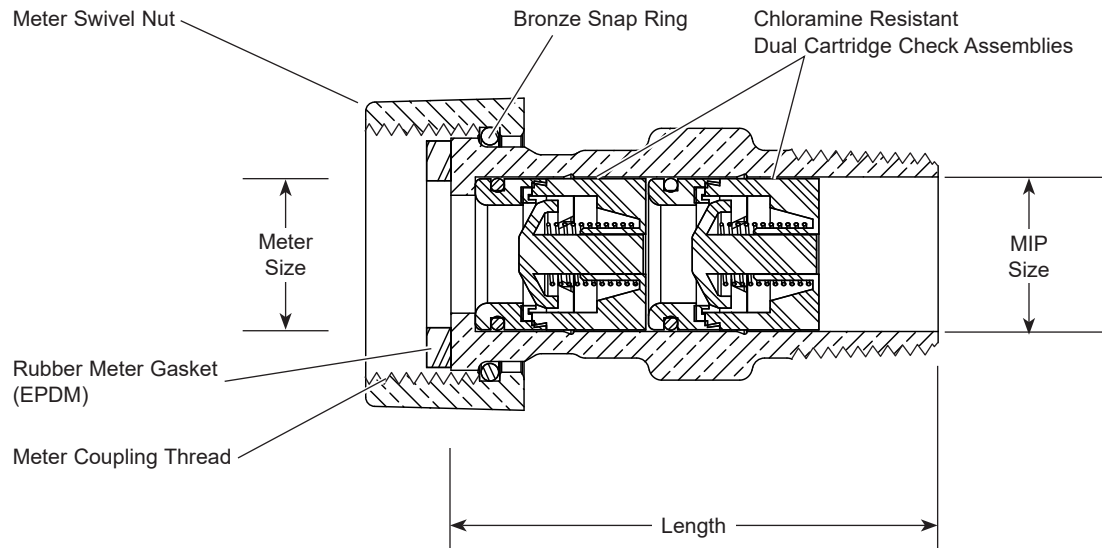

Due to design variations related to sizing, items may differ from images above.

METER SIZE	MIP SIZE	LENGTH (IN.)	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
5/8" x 3/4" & 3/4"	3/4"	2-1/2	0.6	C38-23HCR2-2-5-NL	
1"	1"	3	1.0	C38-44HCR2-3-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- 150 psi working pressure
- Style "B" coupling is long body style with heavy hex on barrel
- Meter swivel nut is not removable
- Conforms to AWWA C700 for meter threads
- Provides backflow protection with integral dual check valve
- Chloramine resistant rubber and plastic components in dual cartridge check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/17/24

Submitted By: