


# SUBMITTAL INFORMATION

## Repair Clamps - (F1-xxx-Length-ASH style)



### 6" TO 8" STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

#### Optional Stainless Taps

ASTM A240 type 304 stainless steel TIG welded to band. Available with AWWA, or I.P. threads.

#### Band


ASTM A240 type 304 stainless steel

#### Lugs

Ductile Iron per ASTM A536  
Finish: E-coat epoxy

#### Nuts and Bolts

Type 304 Stainless Steel with longer starter bolt

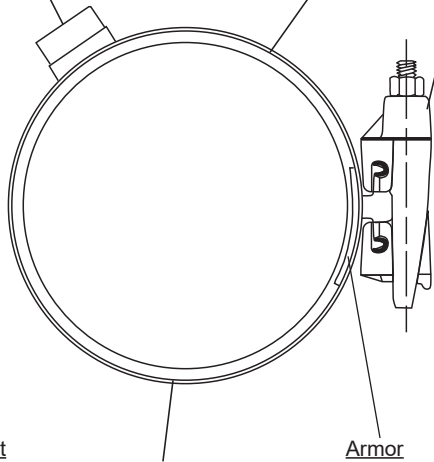


#### Gasket

Gridded Virgin SBR compounded for water service per ASTM D2000. NBR (Buna-N) is available as optional material.

#### Armor

ASTM A240 type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

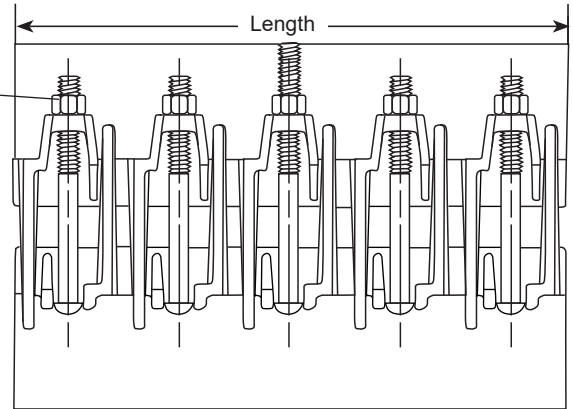

### OUTLET THREAD TAP CODE

| CC (AWWA) THREAD |             | IP THREAD |          |
|------------------|-------------|-----------|----------|
| THREAD           | CODE NUMBER | THREAD    | CODE No. |
| 3/4" CC          | -CC3        | 3/4" IP   | -IP3     |
| 1" CC            | -CC4        | 1" IP     | -IP4     |
| 1-1/4" CC        | -CC5        | 1-1/4" IP | -IP5     |
| 1-1/2" CC        | -CC6        | 1-1/2" IP | -IP6     |
| 2" CC            | -CC7        | 2" IP     | -IP7     |

| NOM. PIPE<br>SIZE | PIPE O.D.<br>RANGE | LENGTH AND APPROXIMATE WEIGHT (LBS.) |     |       |     |     |     | BOLT<br>SIZE  | BAND<br>THICKNESS | CATALOG NUMBER     | ✓ SUBMITTED<br>ITEM(S) |
|-------------------|--------------------|--------------------------------------|-----|-------|-----|-----|-----|---------------|-------------------|--------------------|------------------------|
|                   |                    | 7.5"                                 | 10" | 12.5" | 15" | 20" | 30" |               |                   |                    |                        |
| 6"                | 5.95 - 6.35        | 12                                   | 16  | 20    | 24  | 32  | 48  | 5/8" x 6-1/2" | 20 GA.            | F1-635-Length-ASH  |                        |
|                   | 6.56 - 6.96        |                                      |     |       |     |     |     |               |                   | F1-696-Length-ASH  |                        |
|                   | 6.84 - 7.24        |                                      |     |       |     |     |     |               |                   | F1-724-Length-ASH  |                        |
|                   | 7.05 - 7.45        |                                      |     |       |     |     |     |               |                   | F1-745-Length-ASH  |                        |
|                   | 7.45 - 7.85        |                                      |     |       |     |     |     |               |                   | F1-785-Length-ASH  |                        |
| 8"                | 7.95 - 8.35        | 14                                   | 19  | 23    | 28  | 37  | 55  |               |                   | F1-835-Length-ASH  |                        |
|                   | 8.00 - 8.40        |                                      |     |       |     |     |     |               |                   | F1-840-Length-ASH  |                        |
|                   | 8.54 - 8.94        |                                      |     |       |     |     |     |               |                   | F1-894-Length-ASH  |                        |
|                   | 8.99 - 9.39        |                                      |     |       |     |     |     |               |                   | F1-939-Length-ASH  |                        |
|                   | 9.27 - 9.67        |                                      |     |       |     |     |     |               |                   | F1-967-Length-ASH  |                        |
|                   | 9.70 - 10.10       | 15                                   | 20  | 25    | 29  | 38  | 58  |               |                   | F1-1010-Length-ASH |                        |
|                   | Number of Bolts    |                                      | 3   | 4     | 5   | 6   | 8   | 12            |                   |                    |                        |

### FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances
- Optional Outlet Taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

09/17/19

Submitted By: