


SUBMITTAL INFORMATION

Repair Clamps - (F1-xxx-Length-BBN style)



STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS WITH BLUE FLUOROCARBON-COATED HARDWARE

Optional Stainless Taps

Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.

Band

Type 304 stainless steel

Lugs

Ductile Iron per ASTM A536
Finish: E-coat epoxy

Nuts and Bolts

High strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating

Optional


Type 304 stainless steel bolts and nuts per ASTM A193 and A194

Armor

Type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

Gasket

Gridded Virgin SBR compounded for water service, per ASTM D2000. NBR (Buna-N) is available.

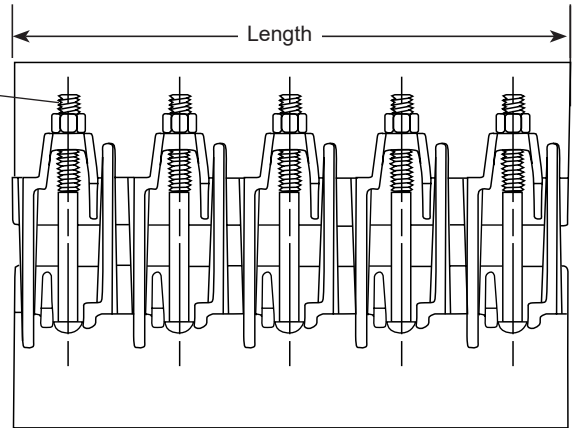

OUTLET THREAD TAP CODE

CC (AWWA) Thread			IP Thread		
THREAD	CODE NUMBER	MIN. CLAMP SZ. (IN.)	THREAD	CODE NUMBER	MIN. CLAMP SZ. (IN.)
3/4" CC	-CC3	2.63	3/4" IP	-IP3	2.63
1" CC	-CC4	2.63	1" IP	-IP4	2.63
1-1/4" CC	-CC5	3.25	1-1/4" IP	-IP5	3.25
1-1/2" CC	-CC6	3.25	1-1/2" IP	-IP6	3.25
2" CC	-CC7	4.00	2" IP	-IP7	4.00

NOM. PIPE SIZE (IN.)	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE (IN.)	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		7.5"	10"	12.5"	15"	20"	30"				
1	1.88 - 2.15	7	9	12	14	n/a	n/a	5/8 x 6-1/2	24 GA.	F1-215-Length-BBN	
2	2.35 - 2.63	7	9	12	14	n/a	n/a			F1-263-Length-BBN	
2-1/4 - 2-1/2	2.70 - 3.00	7	10	12	14	n/a	n/a			F1-300-Length-BBN	
	2.97 - 3.25									F1-325-Length-BBN	
3	3.46 - 3.70	8	10	12	14	n/a	n/a			F1-370-Length-BBN	
	3.73 - 4.00									F1-400-Length-BBN	
3 - 4	3.96 - 4.25	8	11	13	15	n/a	n/a		24 GA.	F1-425-Length-BBN	
	4.45 - 4.73									F1-473-Length-BBN	
4	4.74 - 5.14	11	15	18	22	29	44			F1-514-Length-BBN	
	4.95 - 5.35									F1-535-Length-BBN	
	5.22 - 5.62									F1-562-Length-BBN	
Number of Bolts		3	4	5	6	8	12				

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch.
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances.
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number.
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel.
- Nuts and bolts are high strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/15/24

Submitted By: