


SUBMITTAL INFORMATION

Repair Clamps - (F1-xxx-Length-N-SH style)



STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

Optional Stainless Taps

Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.

Band

Type 304 stainless steel

Lugs

Ductile Iron per ASTM A536
Finish - E-coat epoxy

Nuts and Bolts


Type 304 stainless steel per ASTM A193 and A194

Armor

Type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

Gasket

Gridded NBR (Buna-N) compounded for water service, per ASTM D2000

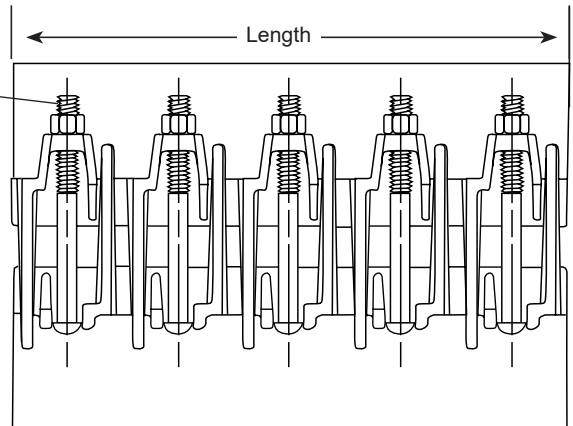

OUTLET THREAD TAP CODE

CC (AWWA) Thread			IP Thread		
THREAD	CODE NUMBER	MIN. CLAMP SZ. (IN.)	THREAD	CODE NUMBER	MIN. CLAMP SZ. (IN.)
3/4" CC	-CC3	2.63	3/4" IP	-IP3	2.63
1" CC	-CC4	2.63	1" IP	-IP4	2.63
1-1/4" CC	-CC5	3.25	1-1/4" IP	-IP5	3.25
1-1/2" CC	-CC6	3.25	1-1/2" IP	-IP6	3.25
2" CC	-CC7	4.00	2" IP	-IP7	4.00

NOM. PIPE SIZE (IN.)	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE (IN.)	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		7.5"	10"	12.5"	15"	20"	30"				
1	1.88 - 2.15	7	9	12	14	n/a	n/a	5/8 x 6-1/2	24 GA.	F1-215-Length-N-SH	
2	2.35 - 2.63	7	9	12	14	22	34			F1-263-Length-N-SH	
2-1/4 - 2-1/2	2.70 - 3.00	7	10	12	14	23	n/a			F1-300-Length-N-SH	
3	2.97 - 3.25	8	10	12	14	24	36			F1-325-Length-N-SH	
	3.46 - 3.70									F1-370-Length-N-SH	
	3.73 - 4.00									F1-400-Length-N-SH	
3 - 4	3.96 - 4.25	8	11	13	15	25	37			F1-425-Length-N-SH	
	4.45 - 4.73									F1-473-Length-N-SH	
4	4.50 - 4.80	11	15	18	22	26	40			24 GA.	F1-480-Length-N-SH
	4.74 - 5.14								F1-514-Length-N-SH		
	4.95 - 5.35								F1-535-Length-N-SH		
	5.22 - 5.62								F1-562-Length-N-SH		
Number of Bolts		3	4	5	6	8	12				

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch.
- Nuts and bolts - Type 304 stainless steel per ASTM A193 and A194
- Gasket - NBR (Buna-N) per ASTM D2000
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances.
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number.
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel.
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/15/24

Submitted By: