


SUBMITTAL INFORMATION

Repair Clamps - (F1-xxxx-Length-SH-U100 style)



10" AND 12" STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS AND 304 STAINLESS STEEL HARDWARE

Optional Stainless Taps
Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.


Band
Type 304 stainless steel

Lugs
Ductile Iron per ASTM A536
Finish: E-coat epoxy

Nuts and Bolts
Type 304 per ASTM A193 and ASTM A194

Gasket
Gridded Virgin SBR compounded for water service, per ASTM D2000. NBR (Buna-N) and EPDM are optional.

Armor
Type 304 heavy gauge stainless steel, mold bonded into the gasket to insure uniform compression against the pipe

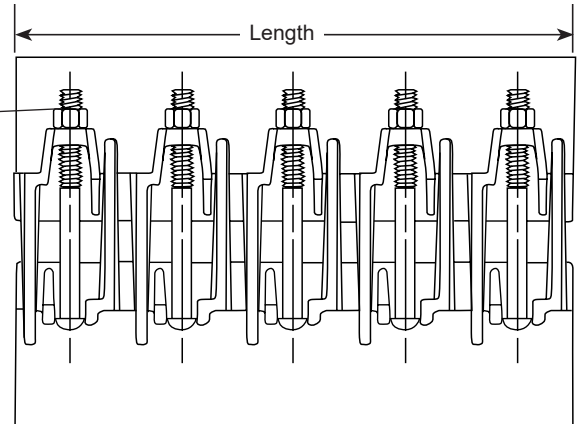

OPTIONAL OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

Note: Tapped clamps are non-returnable.

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		7.5"	10"	12.5"	15"	20"	30"				
10"	10.10 - 10.50	16	21	26	31	41	62	5/8" x 6-1/2"	20 GA.	F1-1050-Length-SH-U100	
	10.60 - 11.04									F1-1104-Length-SH-U100	
	11.04 - 11.44									F1-1144-Length-SH-U100	
	11.34 - 11.74									F1-1174-Length-SH-U100	
	11.75 - 12.15									F1-1215-Length-SH-U100	
12"	12.00 - 12.40	17	22	28	33	44	67			F1-1240-Length-SH-U100	
	12.10 - 12.50									F1-1250-Length-SH-U100	
	12.60 - 13.02									F1-1302-Length-SH-U100	
	13.10 - 13.50									F1-1350-Length-SH-U100	
	13.40 - 13.80	18	23	29	35	46	70			F1-1380-Length-SH-U100	
	13.70 - 14.10									F1-1410-Length-SH-U100	
	14.00 - 14.40									F1-1440-Length-SH-U100	
Number of Bolts		3	4	5	6	8	12				

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs, epoxy-coated via the e-coat process
- Certified to ANSI/NSF Standard 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/26/23

Submitted By: