


SUBMITTAL INFORMATION

Repair Clamps - (F2-xxx-Length-N style)

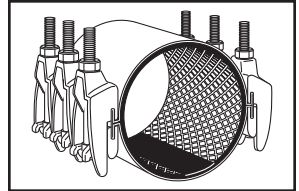

TWO SECTION STAINLESS STEEL REPAIR CLAMPS WITH EPOXY-COATED DUCTILE IRON LUGS AND NBR (BUNA-N) GASKET

Band
Type 304 stainless steel


Optional Stainless Taps
Type 304 stainless steel TIG welded to band. Available with AWWA, or I.P. threads.

Lugs
Ductile iron per ASTM A536
Finish: E-coat epoxy
Note: Lug set on one side of clamp will be closed style. Lug set on other side will consist of one open and one closed style.

Nuts and Bolts
High strength, low alloy steel per ASTM A242 and AWWA C111/A21.11. Nuts are fluorocarbon coated.

Gasket
Gridded NBR (Buna-N) compounded for water service, per ASTM D2000.

Armors
Heavy gauge Type 304 stainless steel, are mold bonded into the gasket to ensure uniform compression against the pipe.

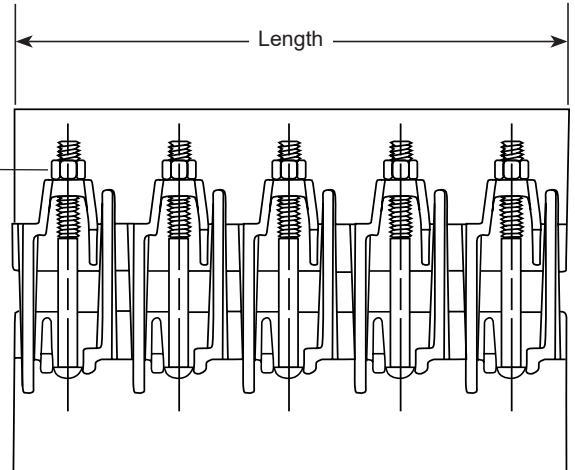

OPTIONAL OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE NUMBER
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		7.5"	10"	12.5"	15"	20"	30"				
4"	*4.45 - 5.24	20	27	32	40	53	80	5/8" x 6-1/2"	20 GA	F2-525-Length-N	
	4.74 - 5.57									F2-557-Length-N	
4" Special	4.45 - 5.60		29		43	58	87			F2W-560-Length-N	
	6.62 - 7.42									F2-742-Length-N	
6"	6.84 - 7.64	22	29	36	43	57	86			F2-764-Length-N	
	7.60 - 8.40									F2-840-Length-N	
8"	8.62 - 9.42	23	29	38	46	61	92			F2-942-Length-N	
	8.99 - 9.79									F2-979-Length-N	
Number of Bolts		6	8	10	12	16	24				

* 1-1/2" Outlet Tap is the largest available on this size clamp.

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs are standard
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/24/24

Submitted By: