



SUBMITTAL INFORMATION

Repair Clamps - (F2-xxxx-Length-N-BBN style)



14" TO 20" - TWO SECTION STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS, NBR (BUNA-N) GASKET AND BLUE FLUOROCARBON-COATED HARDWARE

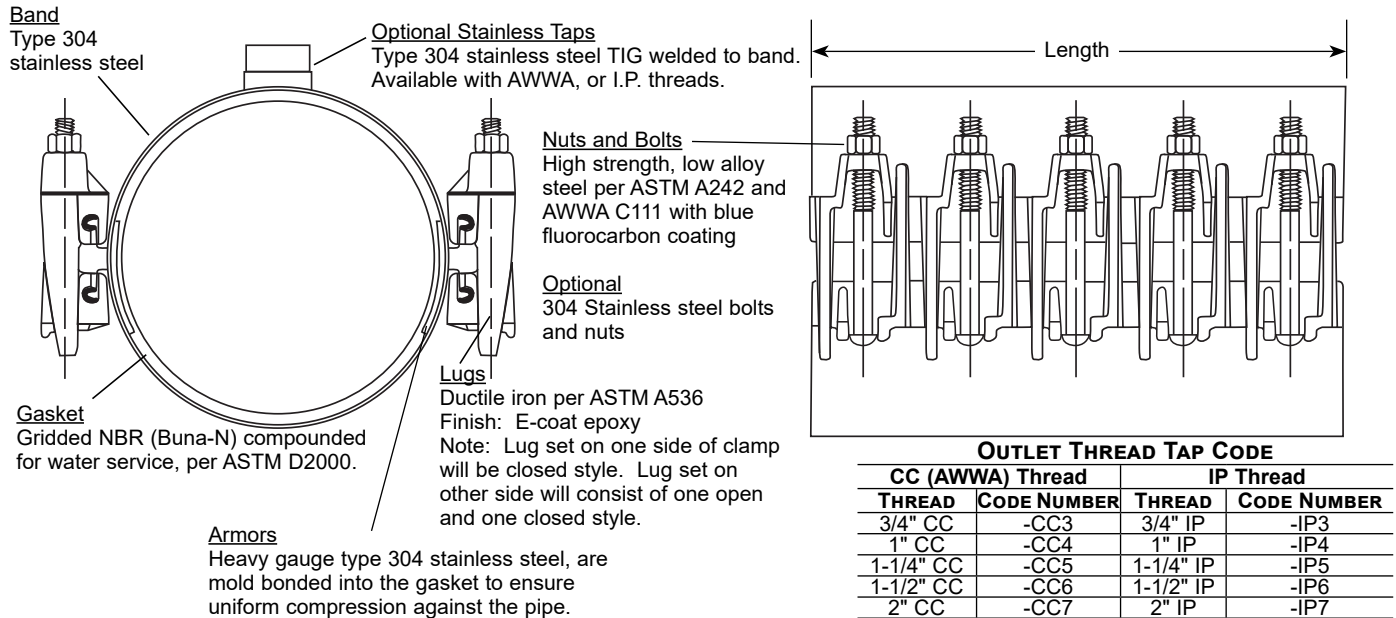

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)					BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(s)
		10"	12.5"	15"	20"	30"				
14"	14.38 - 15.13	31	38	48	71	101	5/8" x 6-1/2"	20 GA	F2-1513-Length-N-BBN	
	15.07 - 15.82	31	38	49	71	101			F2-1582-Length-N-BBN	
	15.20 - 16.20	31	38	49	71	101			F2-1620-Length-N-BBN	
	15.92 - 16.67	32	38	49	72	102			F2-1667-Length-N-BBN	
	16.00 - 17.00	32	38	49	72	102			F2-1700-Length-N-BBN	
	16.56 - 17.31	32	38	50	72	103			F2-1731-Length-N-BBN	
16"	17.15 - 17.90	32	38	50	72	104			F2-1790-Length-N-BBN	
	17.20 - 18.20	32	38	50	72	104			F2-1820-Length-N-BBN	
	17.82 - 18.57	33	38	52	73	104			F2-1857-Length-N-BBN	
	18.40 - 19.40	33	39	52	73	104			F2-1940-Length-N-BBN	
	18.46 - 19.21	33	39	53	73	104			F2-1921-Length-N-BBN	
	19.23 - 19.98	34	39	53	74	105			F2-1998-Length-N-BBN	
18"	19.40 - 20.40	34	39	53	74	105			F2-2040-Length-N-BBN	
	19.90 - 20.65	34	39	53	74	105			F2-2065-Length-N-BBN	
	20.40 - 21.40	34	39	53	74	105			F2-2140-Length-N-BBN	
	20.70 - 21.45	35	39	54	75	106			F2-2145-Length-N-BBN	
	21.40 - 22.40	35	39	54	75	106			F2-2240-Length-N-BBN	
	21.52 - 22.27	35	39	54	75	106			F2-2227-Length-N-BBN	
20"	22.12 - 22.87	36	40	55	76	110			F2-2287-Length-N-BBN	
	22.50 - 23.60	36	40	55	76	110			F2-2360-Length-N-BBN	
	22.90 - 23.65	36	40	55	76	110			F2-2365-Length-N-BBN	
Number of Bolts		8	10	12	16	24				

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Optional outlet taps are available for repair of service line pull-outs. Add tap code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs
- Certified to ANSI/NSF Standard 61
- Gasket is NBR (Buna-N) per ASTM D2000
- Nuts and bolts are high strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/17/19

Submitted By: