



SUBMITTAL INFORMATION

Repair Clamps - (F2-xxxx-Length-SH style)




14" TO 20" - TWO SECTION STAINLESS STEEL REPAIR CLAMPS WITH EPOXY-COATED DUCTILE IRON LUGS AND 304 STAINLESS STEEL HARDWARE

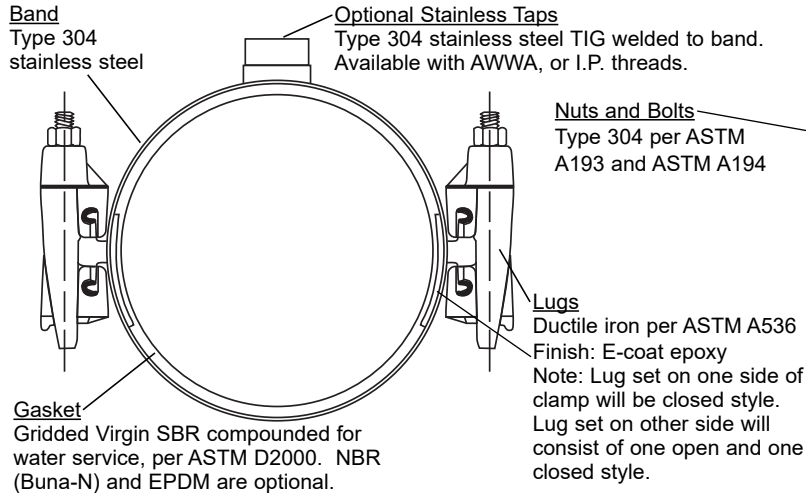

Armors

Heavy gauge type 304 stainless steel, are mold bonded into the gasket to ensure uniform compression against the pipe.

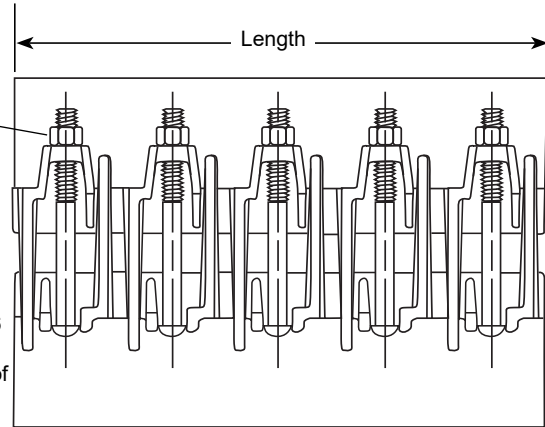

OPTIONAL OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE NUMBER
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

Note: Tapped clamps are non-returnable.

NOM. PIPE SIZE	PIPE O.D. RANGE	LENGTH AND APPROXIMATE WEIGHT (LBS.)					BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		10"	12.5"	15"	20"	30"				
14"	14.38 - 15.13	31	38	48	71	101	5/8" x 6-1/2"	20 GA	F2-1513-Length-SH	
	15.07 - 15.82	31	38	49	71	101			F2-1582-Length-SH	
	15.20 - 16.20	31	38	49	71	101			F2-1620-Length-SH	
	15.92 - 16.67	32	38	49	72	102			F2-1667-Length-SH	
	16.00 - 1700	32	38	49	72	102			F2-1700-Length-SH	
16"	16.56 - 17.31	32	38	50	72	103			F2-1731-Length-SH	
	17.15 - 17.90	32	38	50	72	104			F2-1790-Length-SH	
	17.20 - 18.20	32	38	50	72	104			F2-1820-Length-SH	
	17.82 - 18.57	33	38	52	73	104			F2-1857-Length-SH	
	18.40 - 19.40	33	39	52	73	104			F2-1940-Length-SH	
18"	18.46 - 19.21	33	39	53	73	104			F2-1921-Length-SH	
	19.23 - 19.98	34	39	53	74	105			F2-1998-Length-SH	
	19.40 - 20.40	34	39	53	74	105			F2-2040-Length-SH	
	19.90 - 20.65	34	39	53	74	105			F2-2065-Length-SH	
	20.40 - 21.40	34	39	53	74	105			F2-2140-Length-SH	
20"	20.70 - 21.45	35	39	54	75	106			F2-2145-Length-SH	
	21.40 - 22.40	35	39	54	75	106			F2-2240-Length-SH	
	21.52 - 22.27	35	39	54	75	106			F2-2227-Length-SH	
	22.12 - 22.87	36	40	55	76	110			F2-2287-Length-SH	
	22.50 - 23.60	36	40	55	76	110			F2-2360-Length-SH	
Number of Bolts		8	10	12	16	24			F2-2365-Length-SH	

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Optional outlet taps are available for repair of service line pull-outs. Add tap code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/13/19

Submitted By: