


# SUBMITTAL INFORMATION

## Repair Clamps - (F2-xxxx-Length style)



### TWO SECTION STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

**Band**  
Type 304  
stainless steel

**Optional Stainless Taps**  
Type 304 stainless steel TIG  
welded to band. Available with  
AWWA, or I.P. threads.


**Lugs**  
Ductile iron per ASTM A536  
Finish: E-coat epoxy  
Note: Lug set on one side of  
clamp will be closed style. Lug  
set on other side will consist of  
one open and one closed style.

**Nuts and Bolts**  
High strength, low alloy  
steel per ASTM A242  
and AWWA C111/A21.11.  
Nuts are fluorocarbon  
coated.

**Optional**  
304 Stainless Steel Bolts  
and Nuts



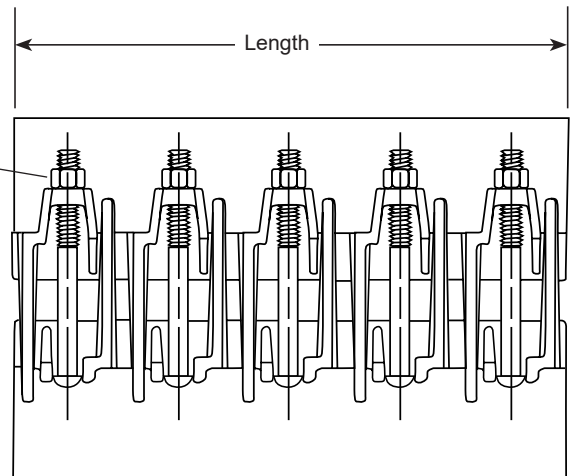

**Gasket**  
Gridded Virgin SBR compounded for  
water service, per ASTM D2000. NBR  
(Buna-N) is optional.

**Armors**  
Heavy gauge type 304 stainless steel,  
are mold bonded into the gasket to  
ensure uniform compression against  
the pipe.



#### OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE NUMBER
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE	PIPE O.D. RANGE	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		7.5"	10"	12.5"	15"	20"	30"				
10"	10.70 - 11.50	24	30	42	46	69	98	5/8" x 6-1/2"	20 GA	F2-1150-Length	
	10.72 - 11.72									F2-1172-Length	
	11.04 - 11.84									F2-1184-Length	
	11.60 - 12.40									F2-1240-Length	
10" Special	11.04 - 12.24		48		71	95	144	3/4" x 8-1/2"	18 GA	F2W-1224-Length	
12"	12.70 - 13.50	27	30	44	47	70	100	5/8" x 6-1/2"	20 GA	F2-1350-Length	
	12.72 - 13.92									F2-1392-Length	
	13.14 - 13.94									F2-1394-Length	
	13.65 - 14.45									F2-1445-Length	
12" Special	13.14 - 14.34		50		75	98	149	3/4" x 8-1/2"	18 GA	F2W-1434-Length	
Number of Bolts		6	8	10	12	16	18				

#### FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Optional outlet taps are available for repair of service line pull-outs. Add tap code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

04/24/24

Submitted By: