

# SUBMITTAL INFORMATION

## Iron Service Saddles - (F202-xxx-TAP-I style)



#### F202 DOUBLE STRAP IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

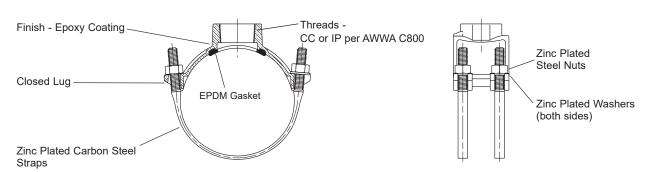

Nom. PIPE SIZE (IN.)	O.D. Range (In.)	APPROX. Wt. Lbs.	Catalog Number	✓SUBMITTED ITEM(S)			
2	<b>2.35 - 2.50</b>	2.8	F202-250-TAP-I				
2-1/2	<b>2.75 - 2.90</b>	2.8	F202-290-TAP-I				
3	*3.46 - 3.80	4.8	F202-380-TAP-I				
	*3.80 - 4.25	5.5	F202-425-TAP-I				
4	**4.26 - 4.80	5.4	F202-480-TAP-I				
	*4.74 - 5.26	5.4	F202-526-TAP-I				
6	5.94 - 6.69	6.5	F202-669-TAP-I				
	6.63 - 6.90	6.5	F202-690-TAP-I				
	6.84 - 7.60	6.8	F202-760-TAP-I				
8	7.93 - 8.71	7.4	F202-871-TAP-I				
	8.63 - 9.05	7.4	F202-905-TAP-I				
	8.99 - 9.79	8.2	F202-979-TAP-I				
10	10.00 - 10.75	10.4	F202-1075-TAP-I				
	10.75 - 11.10	11.5	F202-1110-TAP-I				
	11.10 - 12.12	11.5	F202-1212-TAP-I				
12	12.00 - 12.75	12.5	F202-1275-TAP-I				
	12.75 - 13.20	12.5	F202-1320-TAP-I				
	13.20 - 14.38	12.5	F202-1438-TAP-I				

OUTLET TAP CODE							
CC (AWWA) THREAD							
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)					
3/4" CC	CC3						
1" CC	CC4						
1-1/4" CC	∆ CC5						
1-1/2" CC	CC6						
2" CC	CC7						
IP THREAD							
THREAD	CODE NUMBER	✓ SUBMITTED  ITEM(S)					

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

△ Contact factory for availability

- I = Imported casting
- \* Saddles for this pipe range are <u>not</u> available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.
- \*\* These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe. Example: FC202-480-CC7-I fits 4.80 pipe O.D. only.
- These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

#### **FEATURES**

- Body made of high strength ductile iron per ASTM A536
- Straps are 5/8" AISI C1010 steel, zinc plated with trivalent seal. Each strap has a 5/8" flat bearing surface. For saddles 3" or smaller, straps are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- · Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Rated for the lesser of 350 psi or the pressure of the pipe on which it is installed
- · Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

11/18/25

	nitte	