




SUBMITTAL INFORMATION

Iron Service Saddles - (F202-xxx-TAP style)

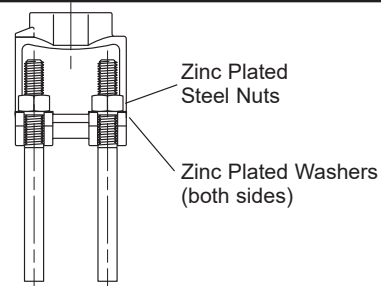

F202 DOUBLE STRAP IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

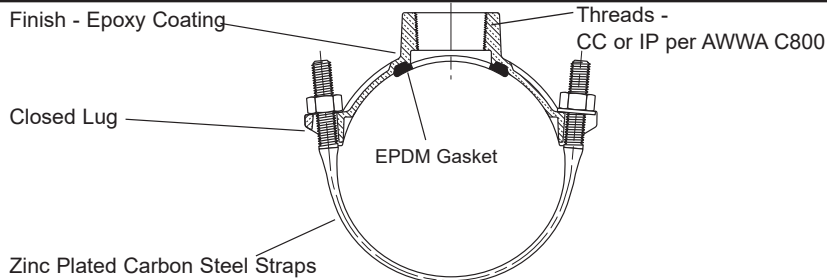

NOM. PIPE SIZE (IN.)	O.D. RANGE (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2	■ 2.35 - 2.50	2.8	F202-250-TAP	
2-1/2	■ 2.75 - 2.90	2.8	F202-290-TAP	
3	*3.46 - 3.80	4.8	F202-380-TAP	
	*3.80 - 4.25	5.5	F202-425-TAP	
4	**4.26 - 4.80	5.4	F202-480-TAP	
	▲ 4.74 - 5.00	5.4	F202-500-TAP	
	*4.74 - 5.26	5.4	F202-526-TAP	
	▲ 4.97 - 5.26	5.4	F202-526-TAP	
6	5.94 - 6.69	6.5	F202-669-TAP	
	6.63 - 6.90	6.5	F202-690-TAP	
	6.84 - 7.60	6.8	F202-760-TAP	
8	7.93 - 8.71	7.4	F202-871-TAP	
	8.63 - 9.05	7.4	F202-905-TAP	
	8.99 - 9.79	8.2	F202-979-TAP	
10	10.00 - 10.75	10.4	F202-1075-TAP	
	10.75 - 11.10	11.5	F202-1110-TAP	
	11.10 - 12.12	11.5	F202-1212-TAP	
12	12.00 - 12.75	12.5	F202-1275-TAP	
	12.75 - 13.20	12.5	F202-1320-TAP	
	13.20 - 14.38	12.5	F202-1438-TAP	
14	15.30 - 16.25	16.0	F202-1625-TAP	
	16.30 - 17.25	16.5	F202-1725-TAP	
16	17.40 - 18.40	17.0	F202-1840-TAP	
	18.50 - 19.25	17.3	F202-1925-TAP	
18	19.50 - 20.50	20.8	F202-2050-TAP	
20	21.20 - 22.20	21.3	F202-2220-TAP	
	22.50 - 23.50	24.0	F202-2350-TAP	
24	23.80 - 24.80	24.5	F202-2480-TAP	
	25.60 - 26.50	31.7	F202-2650-TAP	
30	31.74 - 32.74	42.0	F202-3274-TAP	

* Saddles for this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

** These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe.

Example: F202-480-CC7 fits 4.80 pipe O.D. only

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) taps

■ These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

OUTLET TAP CODE

CC (AWWA) THREAD

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
1/2" IP	Δ IP1	
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Straps are 5/8" AISI C1010 steel, zinc plated with trivalent seal. Each strap has a 5/8" flat bearing surface. For saddles 3" or smaller, straps are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Rated for the lesser of 350 psi on sizes 2"-12", 250 psi on sizes 14"-30", or the pressure of the pipe on which it is installed
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/17/25

Submitted By: