



SUBMITTAL INFORMATION

Repair Clamps - (F3-xxxx-Length style)



THREE SECTION STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

Band
Type 304 stainless steel

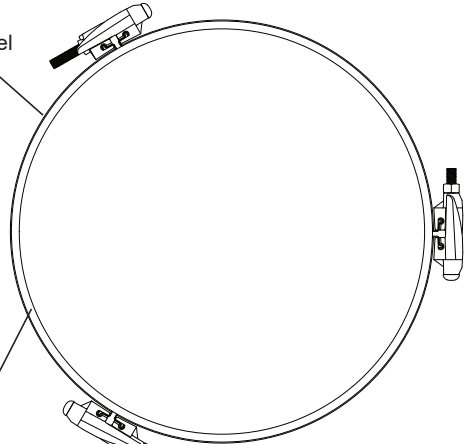

Gasket
Gridded Virgin SBR compounded for water service, per ASTM D2000. NBR (Buna-N) and EPDM are optional.


Armors

Heavy gauge type 304 stainless steel, are mold bonded into the gasket to ensure uniform compression against the pipe.

Nuts and Bolts
High strength, low alloy steel per ASTM A242 and AWWA C111/A21.11. Nuts are fluorocarbon coated.

Optional: Type 304 stainless steel bolts and nuts

Lugs
Ductile Iron per ASTM A536
Finish: E-coat epoxy
Note: Lug set on two sides of clamp will be closed style. Lug set on other side will consist of one open and one closed style.

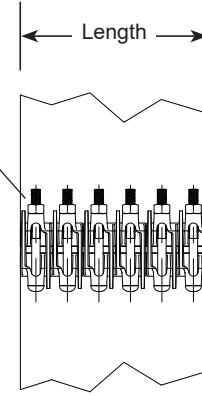

OPTIONAL OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE NUMBER
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

PIPE O.D. RANGE (IN.)	LENGTH AND APPROX. WT. (LBS.)				BOLT SIZE (IN.)	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)		
	10"	15"	20"	30"						
23.18-24.38	55	83	109	183	5/8 x 6-1/2	20 GA	F3-2438-Length			
24.28-25.48	55	84	110	184			F3-2548-Length			
25.60-26.80	56	84	111	185			F3-2680-Length			
26.38-27.58	56	85	112	186			F3-2758-Length			
27.55-28.75	56	85	113	187			F3-2875-Length			
28.63-29.83	62	94	123	190			F3-2983-Length			
28.90-30.10	62	94	123	190			F3-3010-Length			
29.52-30.72	62	94	123	190			F3-3072-Length			
29.62-30.82	62	95	124	190			F3-3082-Length			
30.80-32.00	62	95	124	190			F3-3200-Length			
31.22-32.42	62	95	124	190			F3-3242-Length			
31.74-32.74	56	95	124	190			F3-3294-Length			
Number of Bolts	12	18	24	36						

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Removable lugs
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Optional outlet taps are available for repair
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/21/25

Submitted By: