

SUBMITTAL INFORMATION





STAINLESS STEEL TAPPING SLEEVE

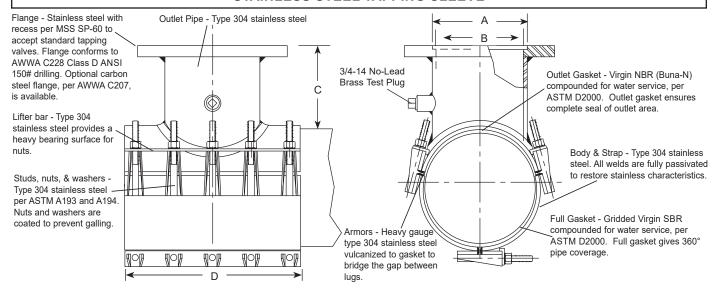

	SLEEVE O.D. RANGE (IN.)	Catalog Number	FLANGE Size (In.)	Nominal Dimensions - Inches							
Nom. Pipe Size				Counter-Bore ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	PE TO OP OF	MIN. NUMBER OF BOLTS	SIZE OF BOLTS	APPROX. Wt. Lbs.	✓ SUBMITTED ITEM(S)
				Α	В	С	D				
20"	21.20-21.60	FAST-2160-x-U100	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	85	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	86	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	87	
			6	7-1/16	6-13/32	5-1/4	16	15	5/8"	92	
			8	9-1/16	8-13/32	5-3/8	20	14	5/8"	114	
			10	11-1/16	10-15/32	5-7/8	20	14	5/8"	124	
			12	13-1/16	12-13/32	6	24	16	5/8"	159	

^{**} To order: Add flanged outlet size to catalog number. Example: The complete FAST catalog number for an 20" pipe (21.60 O.D.) with a 12" stainless steel flange is FAST-2160-12-U100. For a carbon steel flange, add "A" to the catalog number. Example: FAST-2160-12A-U100

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel
- Flange can be either type 304 stainless steel or ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Certified to ANSI/NSF Standard 61
- Rated to 175 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

09/22/22

	nitte	