



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FAST-xxxx-4-L24 style)



STAINLESS STEEL TAPPING SLEEVE, 24" LAYING LENGTH

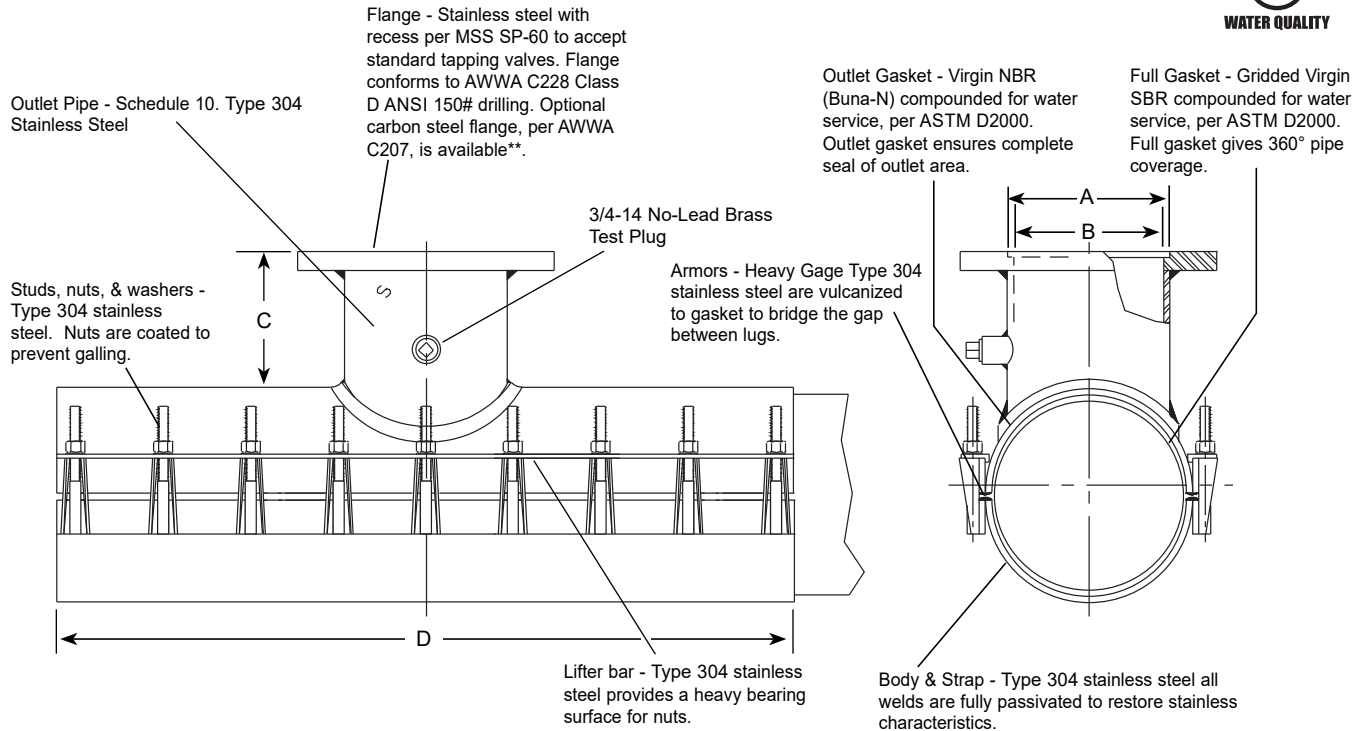

NOM. PIPE SIZE	SLEEVE O.D. RANGE	BY	SS** FLANGE SIZE	APPROX. WT. LBS	NOMINAL DIMENSIONS - INCHES				SADDLE THICKNESS (GAGE)	STRAP THICKNESS (GAGE)	STUD SIZE	No. STUDS	CATALOG NUMBER **	✓ SUBMITTED ITEM(S)
					A	B	C	D						
10"	10.75-11.15 11.05-11.45 11.75-12.15		4	60	5-1/64"	4-1/4"	5-3/16"	24	.105 (12)	.063 (18)	5/8"	14	FAST-1115-4-L24 FAST-1145-4-L24 FAST-1215-4-L24	

** To order: Add flanged outlet size to catalog number. Example: The complete FAST catalog number for a 10" pipe (10.75-11.15 O.D.) with a 4" stainless steel flange is FAST-1115-4-L24. For a carbon steel flange, add "A" to the catalog number. Example: FAST-1115-4A-L24

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel. Flange can be either ASTM A240 type 304 stainless steel or ASTM A36 carbon steel**
- All sleeves are fully passivated for corrosion resistance
- Tapping sleeves rated for 250 psi working pressure on 3"-12"
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- UL classified to ANSI/NSF standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/27/17

Submitted By: