



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FAST-xxxx-x-U style)



STAINLESS STEEL TAPPING SLEEVE

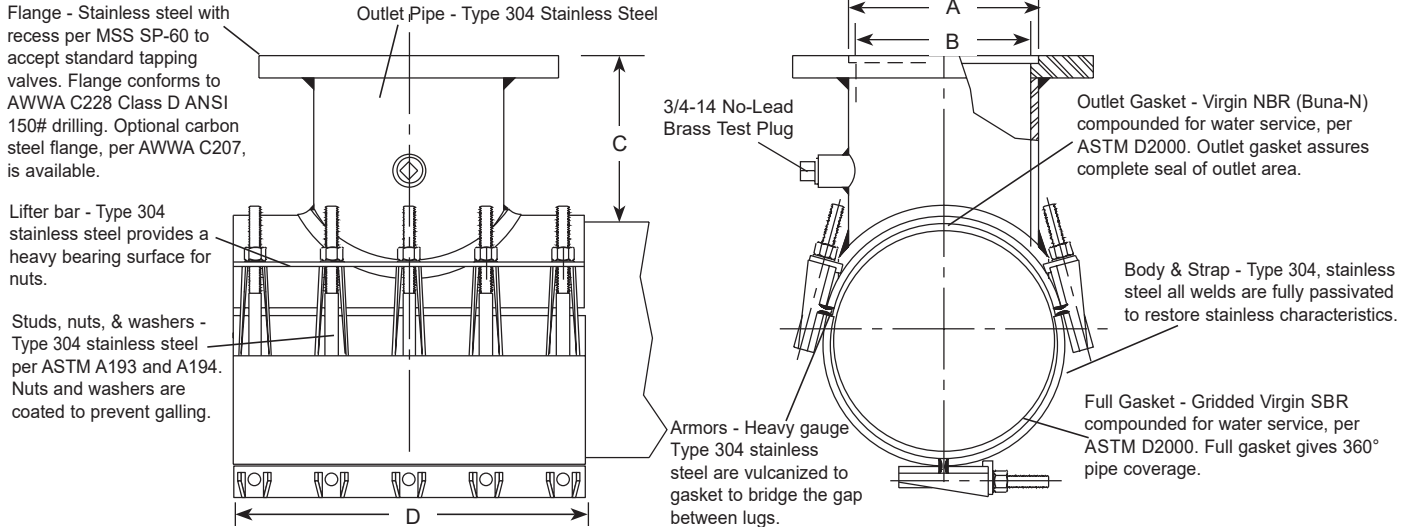

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER**	FLANGE SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NUMBER OF STUDS	STUD DIA.	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C	D				
16"	17.30 - 17.70	FAST-1770-x-U	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	73	
	17.40 - 17.80	FAST-1780-x-U	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	74	
	17.75 - 18.15	FAST-1815-x-U	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	75	
	18.15 - 18.62	FAST-1862-x-U	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	78	
	18.60 - 19.00	FAST-1900-x-U	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	100	
	18.80 - 19.20	FAST-1920-x-U	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	114	
			12	13-1/16	12-13/32	6	24	16	5/8"	146	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	79	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	80	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	81	
			6	7-1/16	6-13/32	5-1/4	16	15	5/8"	86	
			8	9-1/16	8-13/32	5-3/8	20	14	5/8"	106	
18"	19.30 - 19.70	FAST-1970-x-U	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	81	
	19.50 - 19.92	FAST-1992-x-U	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	86	
	19.80 - 20.20	FAST-2020-x-U	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	106	
			10	11-1/16	10-15/32	5-7/8	20	14	5/8"	119	
			12	13-1/16	12-13/32	6	24	16	5/8"	153	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	85	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	86	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	87	
			6	7-1/16	6-13/32	5-1/4	16	15	5/8"	92	
			8	9-1/16	8-13/32	5-3/8	20	14	5/8"	114	
			10	11-1/16	10-15/32	5-7/8	20	14	5/8"	124	
			12	13-1/16	12-13/32	6	24	16	5/8"	159	
20"	20.20 - 20.60	FAST-2060-x-U	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	97	
	20.90 - 21.30	FAST-2130-x-U	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	98	
	21.20 - 21.60	FAST-2160-x-U	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	99	
	21.40 - 21.80	FAST-2180-x-U	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	103	
	21.86 - 22.26	FAST-2226-x-U	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	127	
	22.30 - 22.70	FAST-2270-x-U	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	135	
	23.40 - 23.80	FAST-2380-x-U	12	13-1/16	12-13/32	6	24	16	5/8"	171	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	97	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	98	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	99	
			6	7-1/16	6-13/32	5-1/4	16	15	5/8"	103	
			8	9-1/16	8-13/32	5-3/8	20	14	5/8"	127	
24"	23.80-24.20	FAST-2420-x-U	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	135	
	25.60-26.00	FAST-2600-x-U	12	13-1/16	12-13/32	6	24	16	5/8"	171	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	97	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	98	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	99	
			6	7-1/16	6-13/32	5-1/4	16	15	5/8"	103	

* Highlighted ranges are recommended for ductile iron pipe and C905 PVC applications.

** To order: Add flanged outlet size to catalog number. Example: The complete FAST catalog number for an 20" pipe (21.60 O.D.) with a 12" stainless steel flange is FAST-2160-12-U. For a carbon steel flange, add "A" to the catalog number. Example: FAST-2160-12A-U

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel
- Flange can be either type 304 stainless steel or ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Certified to ANSI/NSF standard 61
- 16" rated to 200 psi, 18"-20" rated to 175 psi, 24" rated to 150 psi. Ratings not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/05/23

Submitted By: