



# SUBMITTAL INFORMATION

## Stainless Steel Tapping Sleeve - (FAST-xxxx-xA-U100 style)



### STAINLESS STEEL TAPPING SLEEVE WITH CARBON STEEL FLANGE

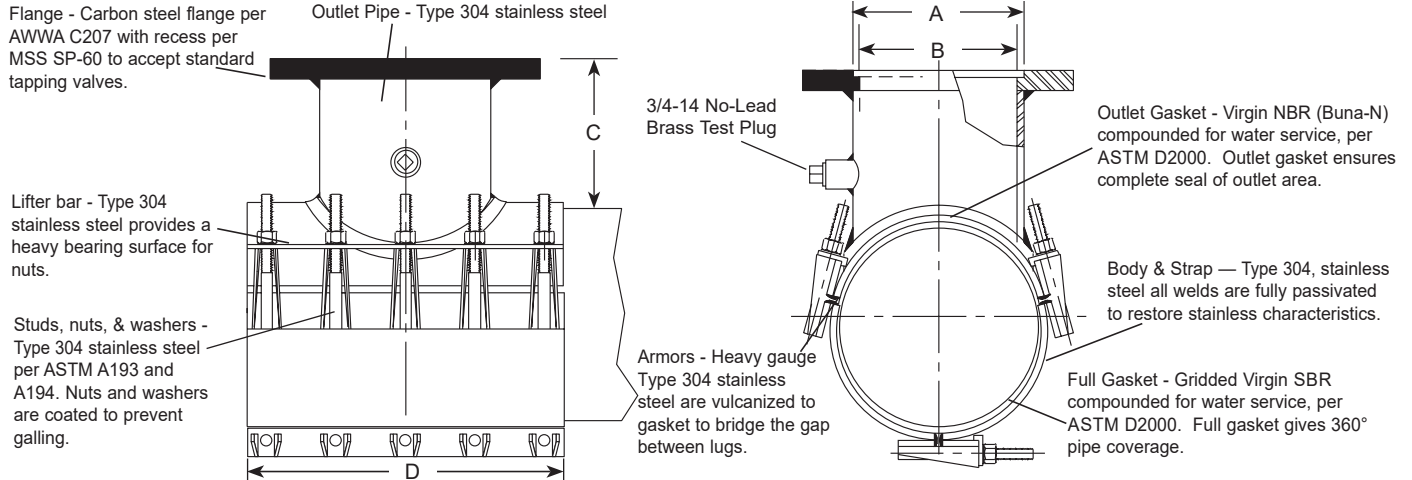

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER**	FLANGE SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NUMBER OF STUDS	STUD DIA.	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C	D				
16"	17.30 - 17.70	FAST-1770-xA-U100	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	73	
	17.40 - 17.80	FAST-1780-xA-U100	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	74	
	17.75 - 18.15	FAST-1815-xA-U100	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	75	
	18.15 - 18.62	FAST-1862-xA-U100	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	78	
	18.60 - 19.00	FAST-1900-xA-U100	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	100	
	18.80 - 19.20	FAST-1920-xA-U100	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	114	
			12	13-1/16	12-13/32	6	24	16	5/8"	146	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	79	
18"	19.30 - 19.70	FAST-1970-xA-U100	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	80	
	19.50 - 19.92	FAST-1992-xA-U100	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	81	
	19.80 - 20.20	FAST-2020-xA-U100	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	86	
			8	9-1/16	8-13/32	5-3/8	20	14	5/8"	106	
			10	11-1/16	10-15/32	5-7/8	20	14	5/8"	119	
			12	13-1/16	12-13/32	6	24	16	5/8"	153	
			2	3-1/16	3-1/4	5-3/8	16	15	5/8"	85	
			3	4-1/16	3-1/4	4-15/16	16	15	5/8"	86	
20"	20.20 - 20.60	FAST-2060-xA-U100	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	87	
	20.90 - 21.30	FAST-2130-xA-U100	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	92	
	21.20 - 21.60	FAST-2160-xA-U100	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	114	
	21.40 - 21.80	FAST-2180-xA-U100	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	124	
	21.86 - 22.26	FAST-2226-xA-U100	12	13-1/16	12-13/32	6	24	16	5/8"	159	
	22.30 - 22.70	FAST-2270-xA-U100	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	97	
	23.40 - 23.80	FAST-2380-xA-U100	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	98	
			4	5-1/16	4-1/4	4-15/16	16	15	5/8"	99	
24"	23.80-24.20	FAST-2420-xA-U100	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	103	
	25.60-26.00	FAST-2600-xA-U100	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	127	
			10	11-1/16	10-15/32	5-7/8	20	14	5/8"	135	
			12	13-1/16	12-13/32	6	24	16	5/8"	171	

Highlighted ranges are recommended for ductile iron pipe and C905 PVC applications.

\*\* To order: Add flanged outlet size to catalog number. Example: The complete FAST catalog number for an 20" pipe (21.60 O.D.) with a 12" carbon steel flange is FAST-2160-12A.

#### FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel
- Flange is ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Certified to ANSI/NSF standard 61
- 16" rated to 200 psi, 18"-20" rated to 175 psi, 24" rated to 150 psi. Ratings not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

02/27/23

Submitted By: