



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FASTP-xxxx-x-Q style)



TYPE 316 STAINLESS STEEL TAPPING SLEEVE FOR HDPE PIPE

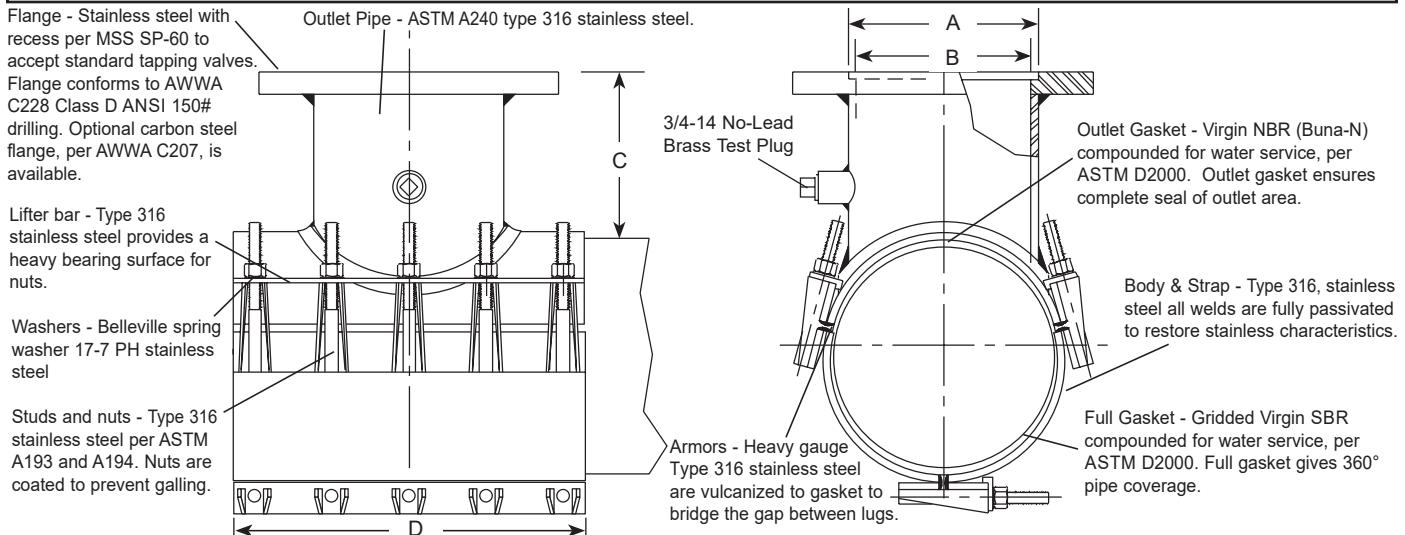

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	FLANGE SIZE (IN.)	NOMINAL DIMENSIONS - INCHES				MIN. NUMBER OF BOLTS	SIZE OF BOLTS	APPROX. WT. LBS.	CATALOG NUMBER**	
			COUNTER- BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
				A	B	C	D				
16	16.00	2	3-1/16	3-1/4	5-3/8	16	15	5/8"	73	FASTP-1600-x-Q FASTP-1740-x-Q	
		3	4-1/16	3-1/4	4-15/16	16	15	5/8"	74		
		4	5-1/16	4-1/4	4-15/16	16	15	5/8"	75		
		6	7-1/16	6-13/32	5-1/4	16	15	5/8"	78		
	17.40	8	9-1/16	8-13/32	5-3/8	20	14	5/8"	100		
		10	11-1/16	10-15/32	5-7/8	20	14	5/8"	114		
		12	13-1/16	12-13/32	6	24	16	5/8"	146		
		2	3-1/16	3-1/4	5-3/8	16	15	5/8"	79		
18	18.00	3	4-1/16	3-1/4	4-15/16	16	15	5/8"	80	FASTP-1800-x-Q FASTP-1950-x-Q	
		4	5-1/16	4-1/4	4-15/16	16	15	5/8"	81		
		6	7-1/16	6-13/32	5-1/4	16	15	5/8"	86		
		8	9-1/16	8-13/32	5-3/8	20	14	5/8"	106		
	19.50	10	11-1/16	10-15/32	5-7/8	20	14	5/8"	119		
		12	13-1/16	12-13/32	6	24	16	5/8"	153		
		2	3-1/16	3-1/4	5-3/8	16	15	5/8"	85		
		3	4-1/16	3-1/4	4-15/16	16	15	5/8"	86		
20	20.00	4	5-1/16	4-1/4	4-15/16	16	15	5/8"	87	FASTP-2000-x-Q FASTP-2160-x-Q	
		6	7-1/16	6-13/32	5-1/4	16	15	5/8"	92		
		8	9-1/16	8-13/32	5-3/8	20	14	5/8"	114		
		10	11-1/16	10-15/32	5-7/8	20	14	5/8"	124		
	21.60	12	13-1/16	12-13/32	6	24	16	5/8"	159		
		2	3-1/16	3-1/4	5-3/8	16	15	5/8"	97		
		3	4-1/16	3-1/4	4-15/16	16	15	5/8"	98		
		4	5-1/16	4-1/4	4-15/16	16	15	5/8"	99		
24	24.00	6	7-1/16	6-13/32	5-1/4	16	15	5/8"	103	FASTP-2400-x-Q FASTP-2580-x-Q FASTP-2600-x-Q	
		8	9-1/16	8-13/32	5-3/8	20	14	5/8"	127		
		10	11-1/16	10-15/32	5-7/8	20	14	5/8"	135		
		12	13-1/16	12-13/32	6	24	16	5/8"	171		

** To order: Add flanged outlet size to catalog number. Example: The complete FASTP catalog number for an 20" pipe (21.60 O.D.) with a 12" stainless steel flange is FASTP-2160-12-Q. For a carbon steel flange, add "A" to the catalog number. Example: FASTP-2160-12A-Q

FEATURES

- Body, straps and UNC threaded studs are made of type 316 stainless steel
- Flange can be either type 316 stainless steel or ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Belleville spring washers allow for limited pipe expansion and contraction
- 16" rated to 200 psi, 18"-20" rated to 175 psi, 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: