



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FC1-xxx-xxx-ATG style)



STYLE FC1 COUPLINGS WITH ARMOR-TIPPED GASKET FOR CAST, DUCTILE IRON OR PVC PIPE

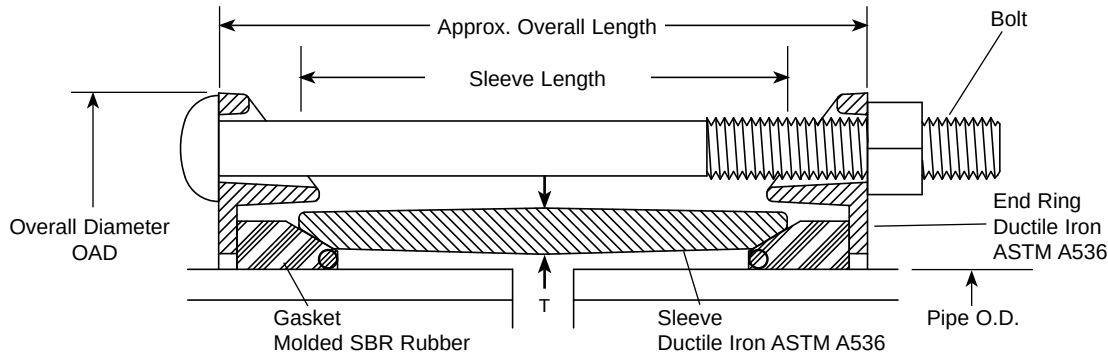

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH. QTY.					
2"	2.34 - 2.63	Red	X	2.34 - 2.63	Red	4"	5/16"	5/8"	6-1/2" 2	5-1/8"	5-5/8"	6	FC1-263-263-ATG	
2-1/2"	See 2" FC2A													
4"	4.00	Red	X	4.00	Red	5"	3/8"	5/8"	8" 3	6-1/8"	8-5/16"	14	FC1-400-400-ATG	
	4.00	Red		4.50 - 4.80	Red								FC1-400-480-ATG	
	4.00	Red		4.80 - 5.10	Black								FC1-400-510-ATG	
	4.50 - 4.80	Red		4.50 - 4.80	Red								FC1-480-480-ATG	
	4.50 - 4.80	Red		4.80 - 5.10	Black								FC1-480-510-ATG	
	4.80 - 5.10	Black		4.80 - 5.10	Black								FC1-510-510-ATG	
6"	6.00	Red	X	6.00	Red	5"	3/8"	5/8"	8" 4	6-1/8"	10-1/2"	20	FC1-600-600-ATG	
	6.00	Red		6.63 - 6.90	Red								FC1-600-690-ATG	
	6.00	Red		6.90 - 7.20	Black								FC1-600-720-ATG	
	6.63 - 6.90	Red		6.63 - 6.90	Red								FC1-690-690-ATG	
	6.63 - 6.90	Red		6.90 - 7.20	Black								FC1-690-720-ATG	
	6.90 - 7.20	Black		6.90 - 7.20	Black								FC1-720-720-ATG	
8"	8.00	Red	X	8.00	Red	5"	3/8"	5/8"	8" 5	6-1/8"	12-13/16"	29	FC1-800-800-ATG	
	8.00	Red		8.63 - 9.05	Red								FC1-800-905-ATG	
	8.00	Red		9.05 - 9.40	Black								FC1-800-940-ATG	
	8.63 - 9.05	Red		8.63 - 9.05	Red								FC1-905-905-ATG	
	8.63 - 9.05	Red		9.05 - 9.40	Black								FC1-905-940-ATG	
	9.05 - 9.40	Black		9.05 - 9.40	Black								FC1-940-940-ATG	
10"	10.75	Red	X	10.75	Red	6"	7/16"	5/8"	9" 6	7-1/8"	15"	41.5	FC1-1075-1075-ATG	
	10.75	Red		11.10 - 11.46	Black								FC1-1075-1146-ATG	
	11.10 - 11.46	Black		11.10 - 11.46	Black								FC1-1146-1146-ATG	
12"	12.75	Red	X	12.75	Red	6"	1/2"	5/8"	9" 7	7-1/8"	17-7/8"	54.5	FC1-1275-1275-ATG	
	12.75	Red		13.20 - 13.56	Black								FC1-1275-1356-ATG	
	13.20 - 13.56	Black		13.20 - 13.56	Black								FC1-1356-1356-ATG	

Note: Restrain if necessary to provide thrust resistance. Flexible couplings do not prevent axial pipe movement.

FEATURES

- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black Alkyd Enamel Shop Coat NSF61 Approved
- NSF 61 Approved
- Complies with AWWA C219
- Armor-tipped gasket provides electrical conductivity

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/12/15

Submitted By: