



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FC1-xxx-xxx-E-U style)



FC1 COUPLINGS FOR CAST, DUCTILE IRON, PVC PIPE OR *HDPE WITH EPOXY COATING

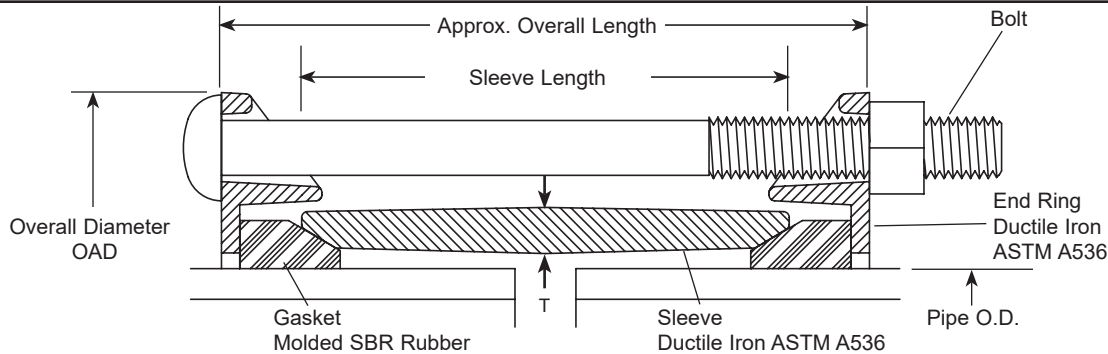

NOM. PIPE SIZE (IN.)	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LENGTH (IN.)	OAD (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LENGTH (IN.)	APPROX. (T) THICKNESS (IN.)	DIA. (IN.)	LENGTH (IN.)	QTY.				
2	2.34 - 2.63	Red	X	2.34 - 2.63	Red	4	5/16	5/8	6-1/2	2	5-1/8	5-5/8	6	FC1-263-263-E-U
2-1/2	See 2 FC2A													
4	4.00	Red	X	4.00	Red	5	3/8	5/8	8	3	6-1/8	8-5/16	14	FC1-400-400-E-U
	4.00	Red		4.50 - 4.80	Red									FC1-400-480-E-U
	4.00	Red		4.80 - 5.10	Black									FC1-400-510-E-U
	4.50 - 4.80	Red		4.50 - 4.80	Red									FC1-480-480-E-U
	4.50 - 4.80	Red		4.80 - 5.10	Red									FC1-480-510-E-U
	4.80 - 5.10	Black		4.80 - 5.10	Black									FC1-510-510-E-U
6	6.00	Red	X	6.00	Red	5	3/8	5/8	8	4	6-1/8	10-1/2	20	FC1-600-600-E-U
	6.00	Red		6.63 - 6.90	Red									FC1-600-690-E-U
	6.00	Red		6.90 - 7.20	Black									FC1-600-720-E-U
	6.30	Red		6.30	Red									FC1-630-630-E-U
	6.63 - 6.90	Red		6.63 - 6.90	Red									FC1-690-690-E-U
	6.63 - 6.90	Red		6.90 - 7.20	Black									FC1-690-720-E-U
8	8.00	Red	X	8.00	Red	5	3/8	5/8	8	5	6-1/8	12-13/16	29	FC1-800-800-E-U
	8.00	Red		8.63 - 9.05	Red									FC1-800-905-E-U
	8.00	Red		9.05 - 9.40	Red									FC1-800-940-E-U
	8.16 - 8.40	Red		8.16 - 8.40	Black									FC1-840-840-E-U
	8.16 - 8.40	Red		9.05 - 9.40	Black									FC1-840-940-E-U
	8.63 - 9.05	Red		8.63 - 9.05	Red									FC1-905-905-E-U
10	8.63 - 9.05	Red	X	9.05 - 9.40	Black	6	7/16	5/8	9	6	7-1/8	15	41.5	FC1-905-940-E-U
	9.05 - 9.40	Black		9.05 - 9.40	Black									FC1-940-940-E-U
	10.20 - 10.50	Red		10.20 - 10.50	Red									FC1-1050-1050-E-U
	10.20 - 10.50	Red		11.10 - 11.46	Black									FC1-1050-1146-E-U
	10.75	Red		10.75	Red									FC1-1075-1075-E-U
	10.75	Red		11.10 - 11.46	Black									FC1-1075-1146-E-U
12	11.10 - 11.46	Black	X	11.10 - 11.46	Black	6	1/2	5/8	9	7	7-1/8	17-7/8	54.5	FC1-1146-1146-E-U
	12.24 - 12.50	Red		12.24 - 12.50	Red									FC1-1250-1250-E-U
	12.75	Red		12.75	Red									FC1-1275-1275-E-U
	12.75	Red		13.20 - 13.56	Black									FC1-1275-1356-E-U
	13.20 - 13.56	Black		13.20 - 13.56	Black									FC1-1356-1356-E-U

Note: Restrain if necessary to provide thrust resistance. Flexible couplings do not prevent axial pipe movement.

* Ford recommends the use of a properly sized insert stiffener when using HDPE

FEATURES

- Bolts and Nuts - High strength low alloy steel per ASTM A242 or AWWA C111
- Finish - Fusion bonded epoxy
- Certified to ANSI/NSF 61
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/10/25

Submitted By: