



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FC1-xxx-xxx-E style)



STYLE FC1 COUPLINGS FOR CAST, DUCTILE IRON OR PVC PIPE

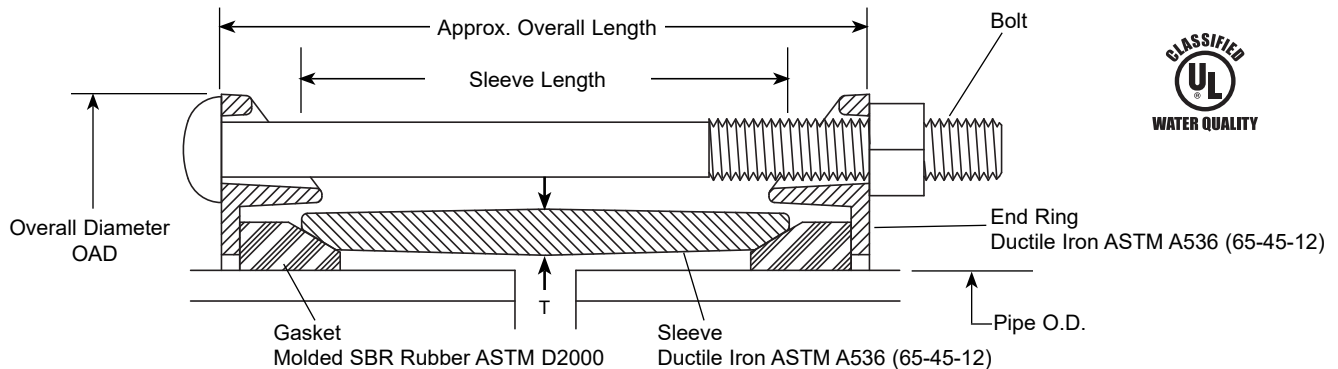

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	BY	GASKET RANGE 2ND HALF CAT. #	CENTER SLEEVE LGTH.	APPROX. (T) THICKNESS	BOLTS DIA.	BOLTS LGTH.	BOLTS QTY.	APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.34 - 2.63	X	2.34 - 2.63	4"	5/16"	5/8"	6-1/2"	2	5-1/8"	5-5/8"	6	FC1-263-263-E	
2-1/2"	See 2" FC2A												
4"	4.00	X	4.00	5"	3/8"	5/8"	8"	3	6-1/8"	8-5/16"	14	FC1-400-400-E	
	4.00		4.50 - 4.80									FC1-400-480-E	
	4.00		4.80 - 5.10									FC1-400-510-E	
	4.50 - 4.80		4.50 - 4.80									FC1-480-480-E	
	4.50 - 4.80		4.80 - 5.10									FC1-480-510-E	
6"	4.80 - 5.10	X	4.80 - 5.10	5"	3/8"	5/8"	8"	4	6-1/8"	10-1/2"	20	FC1-510-510-E	
	6.00		6.00									FC1-600-600-E	
	6.00		6.63 - 6.90									FC1-600-690-E	
	6.00		6.90 - 7.20									FC1-600-720-E	
	6.30		6.30									FC1-630-630-E	
8"	6.63 - 6.90	X	6.63 - 6.90	5"	3/8"	5/8"	8"	5	6-1/8"	12-13/16"	29	FC1-690-690-E	
	6.63 - 6.90		6.90 - 7.20									FC1-690-720-E	
	6.90 - 7.20		6.90 - 7.20									FC1-720-720-E	
	8.00		8.00									FC1-800-800-E	
	8.00		8.63 - 9.05									FC1-800-905-E	
10"	8.00	X	9.05 - 9.40	6"	7/16"	5/8"	9"	6	7-1/8"	15"	41.5	FC1-800-940-E	
	8.16 - 8.40		8.16 - 8.40									FC1-840-840-E	
	8.63 - 9.05		8.63 - 9.05									FC1-905-905-E	
	8.63 - 9.05		9.05 - 9.40									FC1-905-940-E	
	9.05 - 9.40		9.05 - 9.40									FC1-940-940-E	
12"	10.20 - 10.50	X	10.20 - 10.50	6"	1/2"	5/8"	9"	7	7-1/8"	17-7/8"	54.5	FC1-1050-1050-E	
	10.75		10.75									FC1-1075-1075-E	
	10.75		11.10 - 11.46									FC1-1075-1146-E	
	11.10 - 11.46		11.10 - 11.46									FC1-1146-1146-E	
	12.24 - 12.50		12.24 - 12.50									FC1-1250-1250-E	
12"	12.75	X	12.75	6"	1/2"	5/8"	9"	7	7-1/8"	17-7/8"	54.5	FC1-1275-1275-E	
	12.75		13.20 - 13.56									FC1-1275-1356-E	
	13.20 - 13.56		13.20 - 13.56									FC1-1356-1356-E	

FEATURES

- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: fusion-bonded epoxy, per AWWA C213
- NSF 61 Approved
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/23/17

Submitted By: