



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FC1-xxx-xxx-N style)



STYLE FC1 COUPLINGS (WITH NBR (BUNA-N) GASKET) FOR CAST, DUCTILE IRON, PVC PIPE OR *HDPE

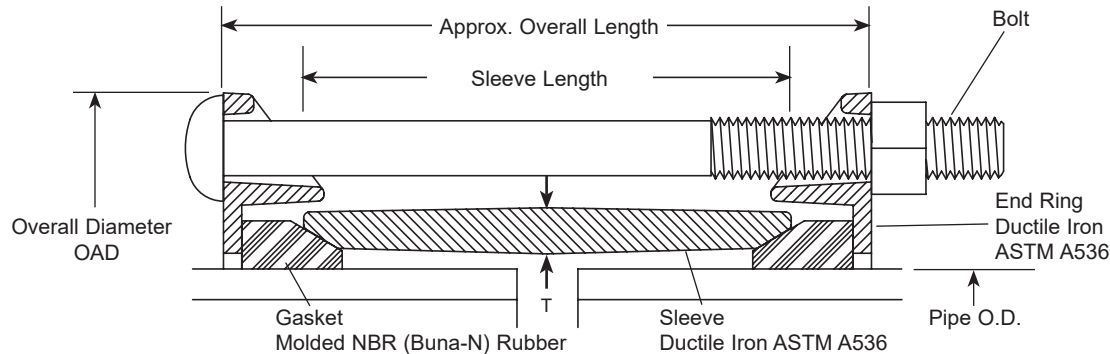

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE LGTH.	APPROX. (T) THICKNESS	BOLTS DIA.	BOLTS LGTH.	BOLTS QTY.	APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.34 - 2.63	Red	X	2.34 - 2.63	Red	4"	5/16"	5/8"	6-1/2"	2	5-1/8"	5-5/8"	6	FC1-263-263-N	
2-1/2"	See 2" FC2A														
4"	4.00	Red	X	4.00	Red	5"	3/8"	5/8"	8"	3	6-1/8"	8-5/16"	14	FC1-400-400-N	
	4.00	Red		4.50 - 4.80	Red									FC1-400-480-N	
	4.00	Red		4.80 - 5.10	Black									FC1-400-510-N	
	4.50 - 4.80	Red		4.50 - 4.80	Red									FC1-480-480-N	
	4.50 - 4.80	Red		4.80 - 5.10	Black									FC1-480-510-N	
	4.80 - 5.10	Black		4.80 - 5.10	Black									FC1-510-510-N	
6"	6.00	Red	X	6.00	Red	5"	3/8"	5/8"	8"	4	6-1/8"	10-1/2"	20	FC1-600-600-N	
	6.00	Red		6.63 - 6.90	Red									FC1-600-690-N	
	6.00	Red		6.90 - 7.20	Black									FC1-600-720-N	
	6.30	Red		6.30	Red									FC1-630-630-N	
	6.63 - 6.90	Red		6.63 - 6.90	Red									FC1-690-690-N	
	6.63 - 6.90	Red		6.90 - 7.20	Black									FC1-690-720-N	
8"	6.90 - 7.20	Black		6.90 - 7.20	Black									FC1-720-720-N	
	8.00	Red	X	8.00	Red	5"	3/8"	5/8"	8"	5	6-1/8"	12-13/16"	29	FC1-800-800-N	
	8.00	Red		8.63 - 9.05	Red									FC1-800-905-N	
	8.00	Red		9.05 - 9.40	Black									FC1-800-940-N	
	8.16 - 8.40	Red		8.16 - 8.40	Red									FC1-840-840-N	
	8.63 - 9.05	Red		8.63 - 9.05	Red									FC1-905-905-N	
10"	8.63 - 9.05	Red		9.05 - 9.40	Black									FC1-905-940-N	
	9.05 - 9.40	Black		9.05 - 9.40	Black									FC1-940-940-N	
	10.20 - 10.50	Red	X	10.20 - 10.50	Red	6"	7/16"	5/8"	9"	6	7-1/8"	15"	41.5	FC1-1050-1050-N	
	10.75	Red		10.75	Red									FC1-1075-1075-N	
	10.75	Red		11.10 - 11.46	Black									FC1-1075-1146-N	
	11.10 - 11.46	Black		11.10 - 11.46	Black									FC1-1146-1146-N	
	12.24 - 12.50	Red		12.24 - 12.50	Red									FC1-1250-1250-N	
12"	12.75	Red		12.75	Red	6"	1/2"	5/8"	9"	7	7-1/8"	17-7/8"	54.5	FC1-1275-1275-N	
	12.75	Red		13.20 - 13.56	Black									FC1-1275-1356-N	
	13.20 - 13.56	Black		13.20 - 13.56	Black									FC1-1356-1356-N	

Note: Restrain if necessary to provide thrust resistance. Flexible couplings do not prevent axial pipe movement.

* Ford recommends the use of a properly sized insert stiffener when using HDPE

FEATURES

- Bolts and Nuts - High strength low alloy steel per ASTM A242 or AWWA C111
- Coating - Black alkyd enamel shop coat
- Gasket - NBR (Buna-N) per ASTM D2000
- Certified to ANSI/NSF 61
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

05/16/22

Submitted By: