



SUBMITTAL INFORMATION

Ductile Iron Couplings - (FC1-xxx-xxx-Z-U100 style)



STYLE FC1 COUPLINGS FOR CAST, DUCTILE IRON OR PVC PIPE WITH EPOXY COATING AND 316 STAINLESS HARDWARE

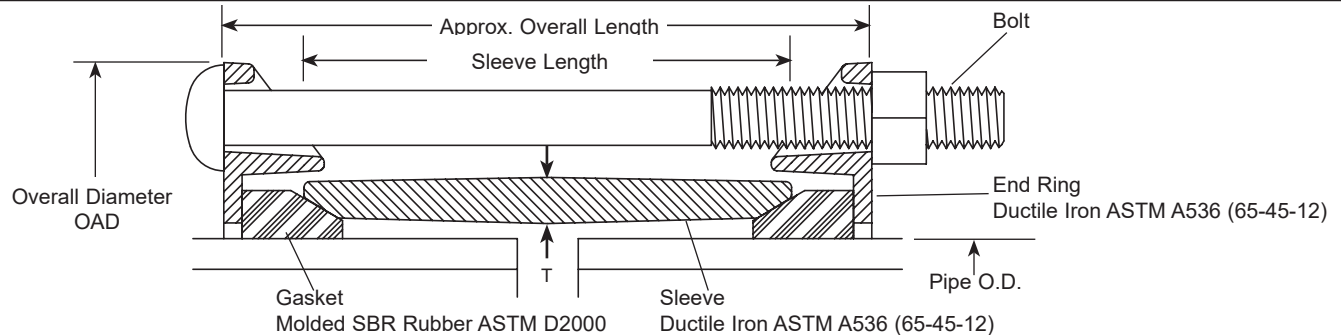

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.	APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.34 - 2.63	Red	X	2.34 - 2.63	Red	4"	5/16"	5/8"	6-1/2"	2	5-1/8"	5-5/8"	6	FC1-263-263-Z-U100	
2-1/2"	See 2" FC2A														
4"	4.00	Red	X	4.00	Red	5"	3/8"	5/8"	8"	3	6-1/8"	8-5/16"	14	FC1-400-400-Z-U100	
	4.00	Red		4.50 - 4.80	Red									FC1-400-480-Z-U100	
	4.00	Red		4.80 - 5.10	Black									FC1-400-510-Z-U100	
	4.50 - 4.80	Red		4.50 - 4.80	Red									FC1-480-480-Z-U100	
	4.50 - 4.80	Red		4.80 - 5.10	Black									FC1-480-510-Z-U100	
	4.80 - 5.10	Black		4.80 - 5.10	Black									FC1-510-510-Z-U100	
6"	6.00	Red	X	6.00	Red	5"	3/8"	5/8"	8"	4	6-1/8"	10-1/2"	20	FC1-600-600-Z-U100	
	6.00	Red		6.63 - 6.90	Red									FC1-600-690-Z-U100	
	6.00	Red		6.90 - 7.20	Black									FC1-600-720-Z-U100	
	6.30	Red		6.30	Red									FC1-630-630-Z-U100	
	6.63 - 6.90	Red		6.63 - 6.90	Red									FC1-690-690-Z-U100	
	6.63 - 6.90	Red		6.90 - 7.20	Black									FC1-690-720-Z-U100	
8"	8.00	Red	X	8.00	Red	5"	3/8"	5/8"	8"	5	6-1/8"	12-13/16"	29	FC1-800-800-Z-U100	
	8.00	Red		8.63 - 9.05	Red									FC1-800-905-Z-U100	
	8.00	Red		9.05 - 9.40	Black									FC1-800-940-Z-U100	
	8.16 - 8.40	Red		8.16 - 8.40	Red									FC1-840-840-Z-U100	
	8.63 - 9.05	Red		8.63 - 9.05	Red									FC1-905-905-Z-U100	
	8.63 - 9.05	Red		9.05 - 9.40	Black									FC1-905-940-Z-U100	
10"	9.05 - 9.40	Black	X	9.05 - 9.40	Black	6"	7/16"	5/8"	9"	6	7-1/8"	15"	41.5	FC1-940-940-Z-U100	
	10.20 - 10.50	Red		10.20 - 10.50	Red									FC1-1050-1050-Z-U100	
	10.75	Red		10.75	Red									FC1-1075-1075-Z-U100	
	10.75	Red		11.10 - 11.46	Black									FC1-1075-1146-Z-U100	
	11.10 - 11.46	Black		11.10 - 11.46	Black									FC1-1146-1146-Z-U100	
	12.24 - 12.50	Red		12.24 - 12.50	Red									FC1-1250-1250-Z-U100	
12"	12.75	Red	X	12.75	Red	6"	1/2"	5/8"	9"	7	7-1/8"	17-7/8"	54.5	FC1-1275-1275-Z-U100	
	12.75	Red		13.20 - 13.56	Black									FC1-1275-1356-Z-U100	
	13.20 - 13.56	Black		13.20 - 13.56	Black									FC1-1356-1356-Z-U100	

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12)
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - 316 stainless steel per ASTM A193 and A194
- Coating - Fusion-bonded epoxy
- Certified to ANSI/NSF 61
- Complies with AWWA C219 and American Iron and Steel (AIS) requirements
- Gasket - Molded SBR rubber per ASTM D2000
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

05/16/22

Submitted By: