

SUBMITTAL INFORMATION

Iron Service Saddles - (FC202-xxx-TAP-I style)



FC202 EPOXY COATED DOUBLE WIDE BAND IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

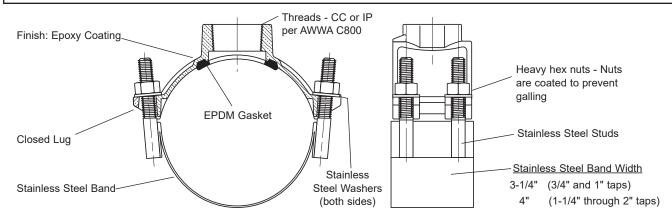

Nom. Pipe	O.D.	APPROX.	CATALOG	✓ SUBMITTED
SIZE (IN.)	RANGE (IN.)	Wt. LBs.	Number	ITEM(S)
2	2.35 - 2.50	2.8	FC202-250-TAP-I	
2-1/2	2.75 - 2.90	2.8	FC202-290-TAP-I	
3	*3.46 - 3.80	4.8	FC202-380-TAP-I	
	*3.80 - 4.25	5.5	FC202-425-TAP-I	
4	**4.26 - 4.80	5.4	FC202-480-TAP-I	
	*4.74 - 5.26	5.4	FC202-526-TAP-I	
	4.50 - 5.40	5.4	FC202-540-TAP-I	
6	5.94 - 6.69	5.7	FC202-669-TAP-I	
	6.63 - 6.90	5.7	FC202-690-TAP-I	
	6.84 - 7.60	6.7	FC202-760-TAP-I	
	6.63 - 7.61	6.7	FC202-761-TAP-I	
8	7.93 - 8.71	6.8	FC202-871-TAP-I	
	8.63 - 9.05	8.2	FC202-905-TAP-I	
	8.99 - 9.79	8.4	FC202-979-TAP-I	
	8.63 - 9.80	8.4	FC202-980-TAP-I	
10	10.00 - 10.75	9.4	FC202-1075-TAP-I	
	10.75 - 11.10	9.0	FC202-1110-TAP-I	
	11.10 - 12.12	10.8	FC202-1212-TAP-I	
	10.64 - 12.13	10.8	FC202-1213-TAP-I	
12	12.00 - 12.75	11.0	FC202-1275-TAP-I	
	12.75 - 13.20	9.0	FC202-1320-TAP-I	
	13.20 - 14.38	12.8	FC202-1438-TAP-I	
	12.62 - 14.39	12.8	FC202-1439-TAP-I	

OUTLET TAP CODE						
CC (AWWA) THREAD						
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)				
3/4" CC	CC3					
1" CC	CC4					
1-1/4" CC	∆ CC5					
1-1/2" CC	CC6					
2" CC	CC7					
IP THREAD						
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)				
3/4" IP	IP3					
1" IP	IP4					
1-1/4" IP	Δ IP5					
1-1/2" IP	IP6					
2" IP	IP7					

 $[\]Delta$ Contact factory for availability

IP8

2-1/2" IP

- * Saddles for this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.
- ** These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe. Example: FC202-480-CC7-I fits 4.80" pipe O.D. only.
- These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Double wide band and 5/8" UNC threaded studs of type 304 stainless steel. For saddles 3" or smaller, studs are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- · Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

11/17/25

I = Imported casting