



# SUBMITTAL INFORMATION

## Fabricated Steel Saddle - (FC202-xxxx-IPxx style)



### 6"-12" FABRICATED STEEL SADDLE WITH STAINLESS STEEL BAND (3" & 4" TAPS)

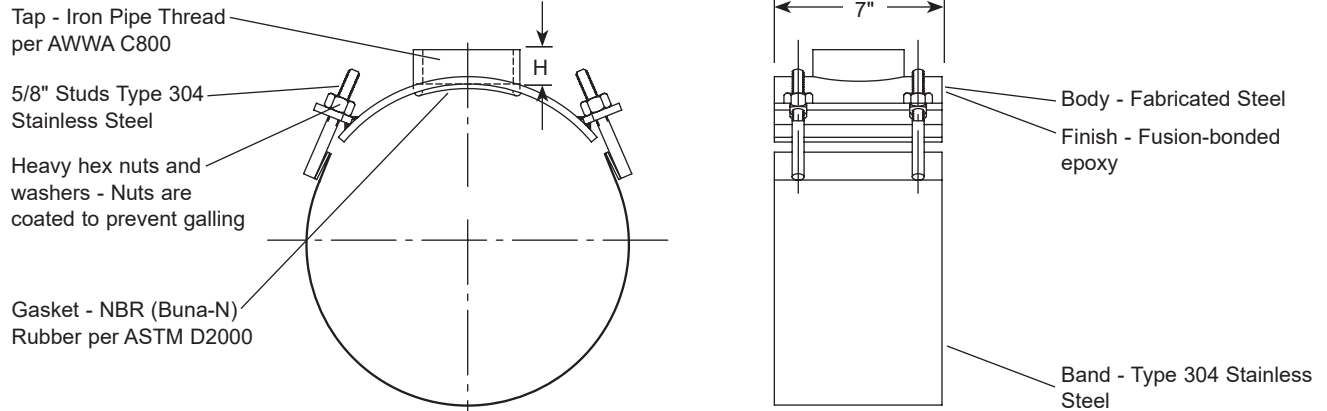

| NOM. PIPE SIZE (IN.) | ACTUAL PIPE O.D. | TAP SIZE (IN.) | BOSS HEIGHT H (IN.) | APPROX. WT. LBS. | CATALOG NUMBER  | ✓ SUBMITTED ITEM(S) |
|----------------------|------------------|----------------|---------------------|------------------|-----------------|---------------------|
| 6                    | 6.00             | 3              | 3-1/16              | 15.7             | FC202-600-IP9   |                     |
|                      | 6.00             | 4              | 3-5/16              | 16.1             | FC202-600-IP11  |                     |
|                      | 6.63             | 3              | 3-1/16              | 16.0             | FC202-663-IP9   |                     |
|                      | 6.63             | 4              | 3-5/16              | 16.3             | FC202-663-IP11  |                     |
|                      | 6.90             | 3              | 3-1/16              | 16.4             | FC202-690-IP9   |                     |
|                      | 6.90             | 4              | 3-5/16              | 16.7             | FC202-690-IP11  |                     |
|                      | 7.60             | 3              | 3-1/16              | 16.8             | FC202-760-IP9   |                     |
|                      | 7.60             | 4              | 3-5/16              | 16.9             | FC202-760-IP11  |                     |
| 8                    | 8.00             | 3              | 3-1/16              | 16.6             | FC202-800-IP9   |                     |
|                      | 8.40             | 4              | 3-5/16              | 17.0             | FC202-800-IP11  |                     |
|                      | 8.63             | 3              | 3-1/16              | 16.9             | FC202-863-IP9   |                     |
|                      | 8.63             | 4              | 3-5/16              | 17.3             | FC202-863-IP11  |                     |
|                      | 9.05             | 3              | 3-1/16              | 17.2             | FC202-905-IP9   |                     |
|                      | 9.05             | 4              | 3-5/16              | 17.5             | FC202-905-IP11  |                     |
| 10                   | 10.00            | 3              | 3-1/16              | 18.0             | FC202-1000-IP9  |                     |
|                      | 10.00            | 4              | 3-5/16              | 19.1             | FC202-1000-IP11 |                     |
|                      | 10.75            | 3              | 3-1/16              | 18.4             | FC202-1075-IP9  |                     |
|                      | 10.75            | 4              | 3-5/16              | 19.5             | FC202-1075-IP11 |                     |
|                      | 11.10            | 3              | 3-1/16              | 18.8             | FC202-1110-IP9  |                     |
|                      | 11.10            | 4              | 3-5/16              | 19.7             | FC202-1110-IP11 |                     |
| 12                   | 12.00            | 3              | 3-1/16              | 20.0             | FC202-1200-IP9  |                     |
|                      | 12.00            | 4              | 3-5/16              | 21.0             | FC202-1200-IP11 |                     |
|                      | 12.75            | 3              | 3-1/16              | 20.5             | FC202-1275-IP9  |                     |
|                      | 12.75            | 4              | 3-5/16              | 21/1             | FC202-1275-IP11 |                     |
|                      | 13.20            | 3              | 3-1/16              | 20.8             | FC202-1320-IP9  |                     |
|                      | 13.20            | 4              | 3-5/16              | 22.1             | FC202-1320-IP11 |                     |

### FEATURES

- Boss tapped with iron pipe threads
- Body made of carbon steel per ASTM A36
- Finish on saddle body is fusion-bonded epoxy coating - NSF 61 certified
- Double wide band and 5/8" UNC threaded studs of type 304 stainless steel
- Conforms to AWWA C800
- Rated for the lesser of 250 psi or the pressure of the pipe on which it is installed

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

[www.fordmeterbox.com](http://www.fordmeterbox.com)

09/04/25

Submitted By: