



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxx-xxx-xxD-U100 style)



6" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPDM GASKET, 316 STAINLESS STEEL HARDWARE AND EPOXY COATING

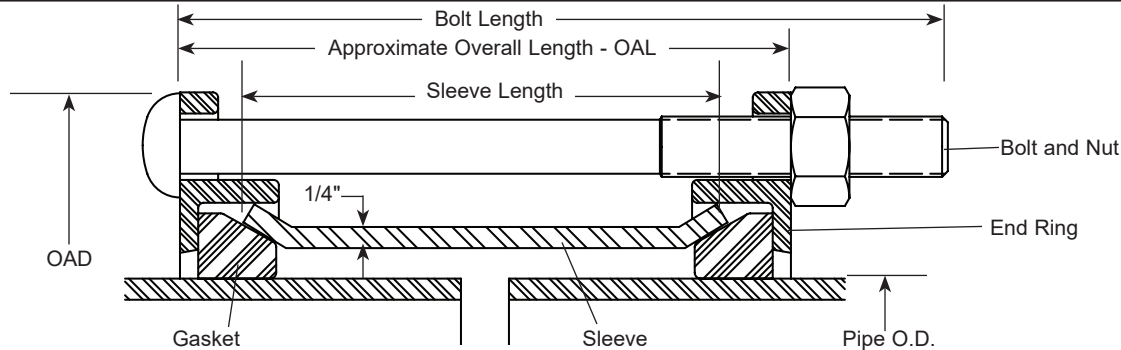

NOM. PIPE SIZE (IN.)	GASKET RANGE (IN.)		CENTER SLEEVE		BOLTS			OAL (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END	2ND END	APPROX. LENGTH (IN.)	OAL (IN.)	No.	DIA. (IN.)	LENGTH (IN.)				
6	6.00	6.00	5	6-1/8	4	5/8	9	10-15/16	24	FC23-600-600-05D-U100	
			7	8-1/8			10-1/2		29	FC23-600-600-07D-U100	
			10	11-1/8			13-1/2		39	FC23-600-600-10D-U100	
		6.63	5	6-1/8			9		24	FC23-600-663-05D-U100	
			7	8-1/8			10-1/2		29	FC23-600-663-07D-U100	
			10	11-1/8			13-1/2		39	FC23-600-663-10D-U100	
		6.90-7.20	5	6-1/8			9		24	FC23-600-720-05D-U100	
			7	8-1/8			10-1/2		29	FC23-600-720-07D-U100	
			10	11-1/8			13-1/2		39	FC23-600-720-10D-U100	
		7.21-7.56	5	6-1/8			9		24	FC23-600-756-05D-U100	
			7	8-1/8			10-1/2		29	FC23-600-756-07D-U100	
			10	11-1/8			13-1/2		39	FC23-600-756-10D-U100	
	6.63	6.63	5	6-1/8	4	5/8	9	10-15/16	24	FC23-663-663-05D-U100	
			7	8-1/8			10-1/2		29	FC23-663-663-07D-U100	
			10	11-1/8			13-1/2		39	FC23-663-663-10D-U100	
		6.90-7.20	5	6-1/8			9		24	FC23-663-720-05D-U100	
			7	8-1/8			10-1/2		29	FC23-663-720-07D-U100	
			10	11-1/8			13-1/2		39	FC23-663-720-10D-U100	
		7.21-7.56	5	6-1/8			9		24	FC23-663-756-05D-U100	
			7	8-1/8			10-1/2		29	FC23-663-756-07D-U100	
			10	11-1/8			13-1/2		39	FC23-663-756-10D-U100	
	6.90-7.20	6.90-7.20	5	6-1/8	4	5/8	9	10-15/16	24	FC23-720-720-05D-U100	
			7	8-1/8			10-1/2		29	FC23-720-720-07D-U100	
			10	11-1/8			13-1/2		39	FC23-720-720-10D-U100	
		7.21-7.56	12	13-1/8			15-1/2		45	FC23-720-720-12D-U100	
			5	6-1/8			9		24	FC23-720-756-05D-U100	
			7	8-1/8			10-1/2		29	FC23-720-756-07D-U100	
	7.21-7.56	7.21-7.56	10	11-1/8			13-1/2		39	FC23-720-756-10D-U100	
			5	6-1/8			9		24	FC23-756-756-05D-U100	
			7	8-1/8			10-1/2		29	FC23-756-756-07D-U100	
		7.21-7.56	10	11-1/8			13-1/2		39	FC23-756-756-10D-U100	
			5	6-1/8			9		24	FC23-756-756-05D-U100	
			7	8-1/8			10-1/2		29	FC23-756-756-07D-U100	
			10	11-1/8			13-1/2		39	FC23-756-756-10D-U100	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- End rings - Ductile iron per ASTM A536. Color coded to match gasket
- Gasket - EPDM rubber per ASTM D2000, embossed with size and end ring color code.
- Bolts and nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Fusion bonded epoxy
- Rated to a working pressure rating of 200 psi or the pressure rating of the pipe on which it is installed
- Certified to ANSI/NSF 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

03/24/25

Submitted By: