



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxx-xxx-xxE style)



COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING

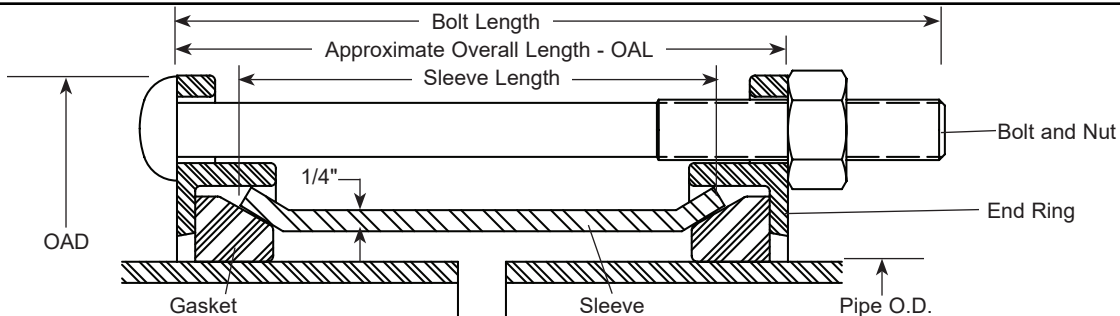

NOM. PIPE SIZE	GASKET RANGE (IN.)		CENTER SLEEVE		BOLTS			OAD	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END	2ND END	APPROX. LENGTH	OAL	No.	DIA.	LENGTH				
6"	6.00	6.00	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-600-600-05E	
			7"	8-1/8"			10-1/2"		29	FC23-600-600-07E	
			10"	11-1/8"			13-1/2"		39	FC23-600-600-10E	
			16"	17-1/8"			20"		49	FC23-600-600-16E	
		6.63	5"	6-1/8"			9"		24	FC23-600-663-05E	
			7"	8-1/8"			10-1/2"		29	FC23-600-663-07E	
			10"	11-1/8"			13-1/2"		39	FC23-600-663-10E	
			16"	17-1/8"			20"		49	FC23-600-663-16E	
		6.90-7.20	5"	6-1/8"			9"		24	FC23-600-720-05E	
			7"	8-1/8"			10-1/2"		29	FC23-600-720-07E	
			10"	11-1/8"			13-1/2"		39	FC23-600-720-10E	
			16"	17-1/8"			20"		49	FC23-600-720-16E	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-600-756-05E	
			7"	8-1/8"			10-1/2"		29	FC23-600-756-07E	
			10"	11-1/8"			13-1/2"		39	FC23-600-756-10E	
			16"	17-1/8"			20"		49	FC23-600-756-16E	
	6.63	6.63	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-663-663-05E	
			7"	8-1/8"			10-1/2"		29	FC23-663-663-07E	
			10"	11-1/8"			13-1/2"		39	FC23-663-663-10E	
			16"	17-1/8"			20"		49	FC23-663-663-16E	
		6.90-7.20	5"	6-1/8"			9"		24	FC23-663-720-05E	
			7"	8-1/8"			10-1/2"		29	FC23-663-720-07E	
			10"	11-1/8"			13-1/2"		39	FC23-663-720-10E	
			16"	17-1/8"			20"		49	FC23-663-720-16E	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-663-756-05E	
			7"	8-1/8"			10-1/2"		29	FC23-663-756-07E	
			10"	11-1/8"			13-1/2"		39	FC23-663-756-10E	
			16"	17-1/8"			20"		49	FC23-663-756-16E	
	6.90-7.20	6.90-7.20	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-720-720-05E	
			7"	8-1/8"			10-1/2"		29	FC23-720-720-07E	
			10"	11-1/8"			13-1/2"		39	FC23-720-720-10E	
			16"	17-1/8"			20"		49	FC23-720-720-16E	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-720-756-05E	
			7"	8-1/8"			10-1/2"		29	FC23-720-756-07E	
			10"	11-1/8"			13-1/2"		39	FC23-720-756-10E	
			16"	17-1/8"			20"		49	FC23-720-756-16E	
	7.21-7.56	7.21-7.56	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-756-756-05E	
			7"	8-1/8"			10-1/2"		29	FC23-756-756-07E	
			10"	11-1/8"			13-1/2"		39	FC23-756-756-10E	
			16"	17-1/8"			20"		49	FC23-756-756-16E	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - ASTM A36 carbon steel
- End Ring - Ductile iron per ASTM A536. Color coded to match gasket
- Gasket - SBR rubber per ASTM D2000
- Bolts & Nuts - High strength, low alloy steel per ASTM A242 and AWWA C111
- Finish - Fusion bonded epoxy
- 200 PSI rated working pressure
- NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/07/23

Submitted By: