



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxx-xxx-xxT-U100 style)



8" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH 316 STAINLESS STEEL HARDWARE

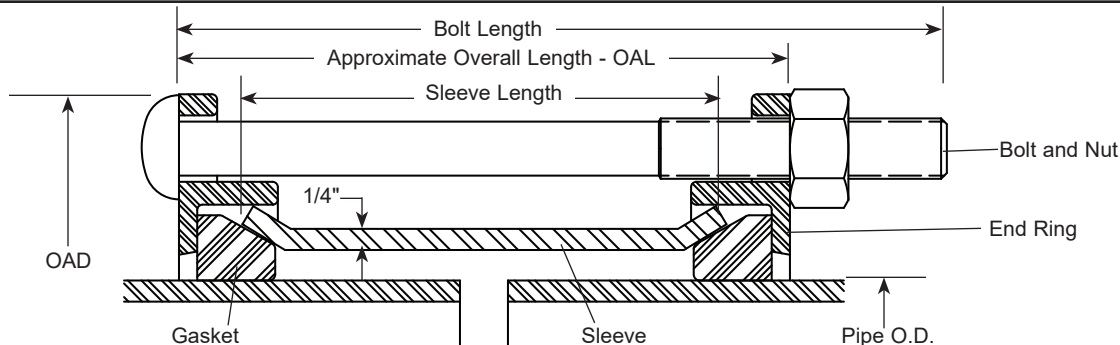

NOM. PIPE SIZE	GASKET RANGE		CENTER SLEEVE		BOLTS			OAD	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END (IN.)	2ND END (IN.)	APPROX. LENGTH	OAL	No.	DIA.	LENGTH				
8"	8.00	8.00	5"	6-1/8"	5	5/8"	9"	13-3/16"	27	FC23-800-800-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-800-800-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-800-800-10T-U100	
		8.63	5"	6-1/8"			9"		27	FC23-800-863-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-800-863-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-800-863-10T-U100	
		9.05-9.40	5"	6-1/8"			9"		27	FC23-800-940-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-800-940-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-800-940-10T-U100	
		9.40-9.74	5"	6-1/8"			9"		27	FC23-800-974-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-800-974-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-800-974-10T-U100	
	8.63	8.63	5"	6-1/8"	5	5/8"	9"	13-3/16"	27	FC23-863-863-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-863-863-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-863-863-10T-U100	
		9.05-9.40	5"	6-1/8"			9"		27	FC23-863-940-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-863-940-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-863-940-10T-U100	
		9.40-9.74	5"	6-1/8"			9"		27	FC23-863-974-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-863-974-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-863-974-10T-U100	
	9.05-9.40	9.05-9.40	5"	6-1/8"	5	5/8"	9"	13-3/16"	27	FC23-940-940-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-940-940-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-940-940-10T-U100	
		9.40-9.74	5"	6-1/8"			9"		27	FC23-940-974-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-940-974-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-940-974-10T-U100	
	9.40-9.74	9.40-9.74	5"	6-1/8"	5	5/8"	9"	13-3/16"	27	FC23-974-974-05T-U100	
			7"	8-1/8"			10-1/2"		32	FC23-974-974-07T-U100	
			10"	11-1/8"			13-1/2"		40	FC23-974-974-10T-U100	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - ASTM A36 carbon steel
- End Ring - Ductile iron per ASTM A536. Color coded to match gasket.
- Gasket - NBR (Buna-N) molded rubber per ASTM D2000 - embossed with size and end ring color code.
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Black epoxy coat with color-coded end rings
- 200 PSI rated working pressure
- Certified to NSF/ANSI 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/23/20

Submitted By: