



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxx-xxx-xxY-U style)



6" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING AND 304 STAINLESS STEEL HARDWARE

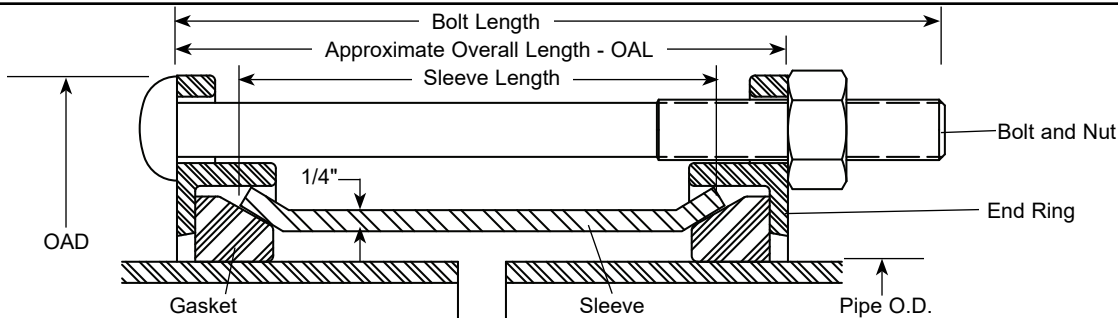

NOM. PIPE SIZE	GASKET RANGE		CENTER SLEEVE		BOLTS			OAD	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END (IN.)	2ND END (IN.)	APPROX. LENGTH	OAL	No.	DIA.	LENGTH				
6"	6.00	6.00	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-600-600-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-600-600-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-600-600-10Y-U	
			16"	17-1/8"			20"		49	FC23-600-600-16Y-U	
		6.63	5"	6-1/8"			9"		24	FC23-600-663-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-600-663-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-600-663-10Y-U	
			16"	17-1/8"			20"		49	FC23-600-663-16Y-U	
		6.90-7.20	5"	6-1/8"			9"		24	FC23-600-720-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-600-720-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-600-720-10Y-U	
			16"	17-1/8"			20"		49	FC23-600-720-16Y-U	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-600-756-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-600-756-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-600-756-10Y-U	
			16"	17-1/8"			20"		49	FC23-600-756-16Y-U	
	6.63	6.63	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-663-663-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-663-663-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-663-663-10Y-U	
			16"	17-1/8"			20"		49	FC23-663-663-16Y-U	
		6.90-7.20	5"	6-1/8"			9"		24	FC23-663-720-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-663-720-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-663-720-10Y-U	
			16"	17-1/8"			20"		49	FC23-663-720-16Y-U	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-663-756-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-663-756-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-663-756-10Y-U	
			16"	17-1/8"			20"		49	FC23-663-756-16Y-U	
	6.90-7.20	6.90-7.20	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-720-720-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-720-720-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-720-720-10Y-U	
			16"	17-1/8"			20"		49	FC23-720-720-16Y-U	
		7.21-7.56	5"	6-1/8"			9"		24	FC23-720-756-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-720-756-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-720-756-10Y-U	
			16"	17-1/8"			20"		49	FC23-720-756-16Y-U	
	7.21-7.56	7.21-7.56	5"	6-1/8"	4	5/8"	9"	10-15/16"	24	FC23-756-756-05Y-U	
			7"	8-1/8"			10-1/2"		29	FC23-756-756-07Y-U	
			10"	11-1/8"			13-1/2"		39	FC23-756-756-10Y-U	
			16"	17-1/8"			20"		49	FC23-756-756-16Y-U	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Sleeve: ASTM A36 carbon steel
- End Ring: Ductile iron per ASTM A536. Color coded to match gasket
- Gasket: SBR molded rubber per ASTM D2000: embossed with size and end ring color code. Optional NBR (Buna-N) or EPDM
- Bolts & Nuts: Type 304 stainless steel per ASTM A193 and A194
- Finish: Fusion-bonded epoxy coating - NSF 61 approved
- 200 PSI rated working pressure
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/11/19

Submitted By: