



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxxx-xxxx-xxD style)



12" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE

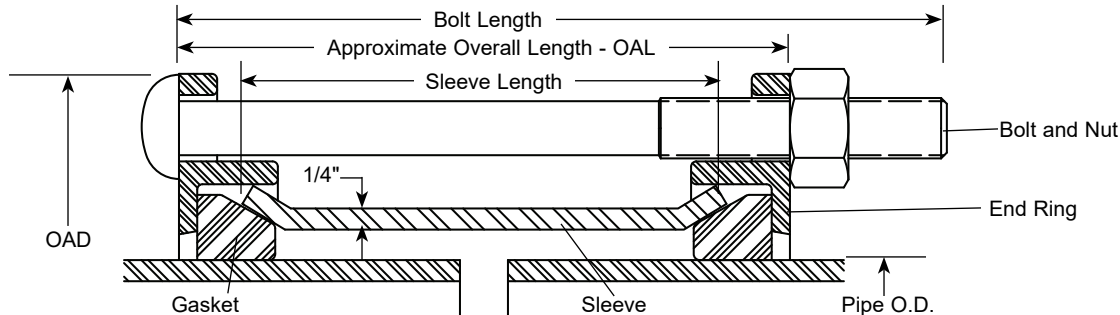

NOM. PIPE SIZE	GASKET RANGE (IN.)		CENTER SLEEVE		BOLTS			OAD	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END	2ND END	LENGTH	APPROX. OAL	No.	DIA.	LENGTH				
12"	12.75	12.75	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1275-1275-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1275-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1275-10D	
			16"	17-1/8"			20"		74	FC23-1275-1275-16D	
		13.20-13.50	5"	6-1/8"			9"		41	FC23-1275-1350-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1350-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1350-10D	
			16"	17-1/8"			20"		74	FC23-1275-1350-16D	
		13.69-14.04	5"	6-1/8"			9"		41	FC23-1275-1404-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1404-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1404-10D	
			16"	17-1/8"			20"		74	FC23-1275-1404-16D	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1275-1438-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1438-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1438-10D	
			16"	17-1/8"			20"		74	FC23-1275-1438-16D	
	13.20-13.50	13.20-13.50	5"	6-1/8"			9"		41	FC23-1350-1350-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1350-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1350-10D	
			16"	17-1/8"			20"		74	FC23-1350-1350-16D	
		13.69-14.04	5"	6-1/8"			9"		41	FC23-1350-1404-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1404-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1404-10D	
			16"	17-1/8"			20"		74	FC23-1350-1404-16D	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1350-1438-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1438-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1438-10D	
			16"	17-1/8"			20"		74	FC23-1350-1438-16D	
	13.69-14.04	13.69-14.04	5"	6-1/8"			9"		41	FC23-1404-1404-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1404-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1404-10D	
			16"	17-1/8"			20"		74	FC23-1404-1404-16D	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1404-1438-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1438-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1438-10D	
			16"	17-1/8"			20"		74	FC23-1404-1438-16D	
	14.03-14.38	14.03-14.38	5"	6-1/8"			9"		41	FC23-1438-1438-05D	
			7"	8-1/8"			10-1/2"		49	FC23-1438-1438-07D	
			10"	11-1/8"			13-1/2"		64	FC23-1438-1438-10D	
			16"	17-1/8"			20"		74	FC23-1438-1438-16D	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - ASTM A36 carbon steel
- End Ring - Ductile iron per ASTM A536. Color coded to match gasket
- Gasket - EPDM molded rubber: embossed with size and end ring color code.
- Bolts & Nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Epoxy coated per AWWA C213
- 200 PSI rated working pressure
- Certified to NSF / ANSI 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/15/21

Submitted By: