



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxxx-xxxx-xxE-U style)



12" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING

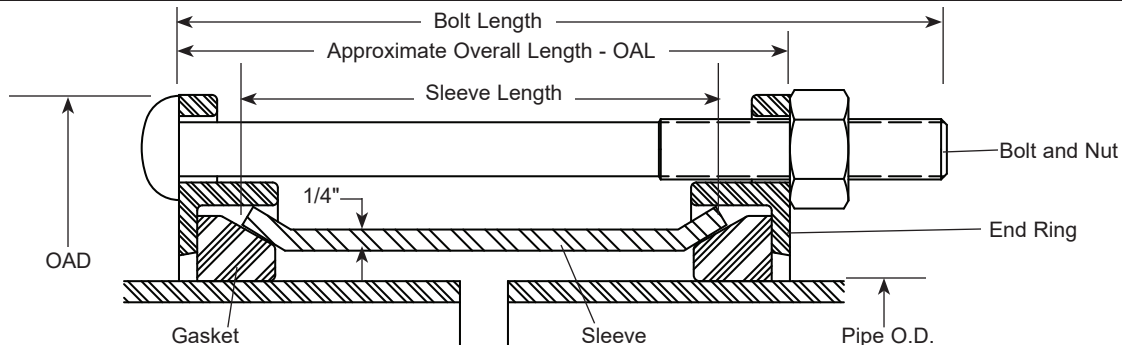

NOM. PIPE SIZE	GASKET RANGE		CENTER SLEEVE		BOLTS			OAD	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END (IN.)	2ND END (IN.)	LENGTH	APPROX. OAL	No.	DIA.	LENGTH				
12"	12.75	12.75	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1275-1275-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1275-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1275-10E-U	
		13.20-13.50	5"	6-1/8"			9"		41	FC23-1275-1350-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1350-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1350-10E-U	
		13.69-14.04	5"	6-1/8"			9"		41	FC23-1275-1404-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1404-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1404-10E-U	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1275-1438-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1438-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1438-10E-U	
	13.20-13.50	13.20-13.50	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1350-1350-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1350-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1350-10E-U	
		13.69-14.04	12"	13-1/8"			15-1/2"		73	FC23-1350-1350-12E-U	
			5"	6-1/8"			9"		41	FC23-1350-1404-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1404-07E-U	
		14.03-14.38	10"	11-1/8"			13-1/2"		64	FC23-1350-1404-10E-U	
			5"	6-1/8"			9"		41	FC23-1350-1438-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1438-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1438-10E-U	
	13.69-14.04	13.69-14.04	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1404-1404-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1404-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1404-10E-U	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1404-1438-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1438-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1438-10E-U	
	14.03-14.38	14.03-14.38	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1438-1438-05E-U	
			7"	8-1/8"			10-1/2"		49	FC23-1438-1438-07E-U	
			10"	11-1/8"			13-1/2"		64	FC23-1438-1438-10E-U	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - ASTM A36 carbon steel
- End Ring - Ductile iron per ASTM A536. Color coded to match gasket
- Gasket - SBR Molded Rubber: embossed with size and end ring color code. Optional NBR (Buna-N) or EPDM
- Bolts & Nuts - High strength low alloy steel per ASTM A242 and AWWA C111. Optional: Types 304 and 316 stainless or electro galvanized
- Finish - Epoxy coated per AWWA C213
- 200 PSI - Rated working pressure
- NSF 61 Approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/03/21

Submitted By: