



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxxx-xxxx-xxE style)



16"-24" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S

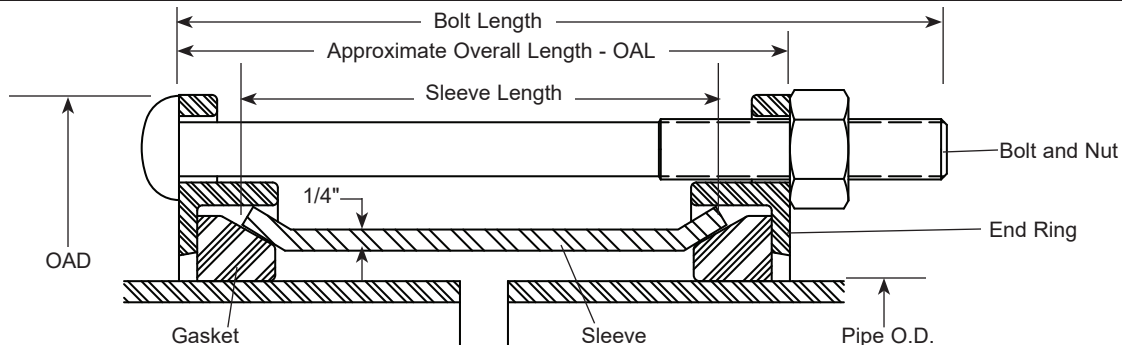

NOM. PIPE SIZE	1ST END GASKET RANGE	2ND END GASKET RANGE	CENTER SLEEVE		BOLTS		OAD	APPROX WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			LENGTH	APPROX. OAL	No.	SIZE				
16"	17.40-17.80	17.40-17.80	5	6-1/8"	10	5/8 x 9"	23-5/16"	76	FC23-1780-1780-05E	
		17.40-17.80	7	8-1/8"		5/8" x 10-1/2"		88	FC23-1780-1780-07E	
		17.40-17.80	10	11-1/8"		5/8 x 13-1/2"		102	FC23-1780-1780-10E	
		17.40-17.80	12	13-1/8"		5/8" x 15-1/2"		122	FC23-1780-1780-12E	
		18.45-18.97	5	6-1/8"		5/8 x 9"		71	FC23-1780-1897-05E	
		18.45-18.97	7	8-1/8"		5/8" x 10-1/2"		83	FC23-1780-1897-07E	
		18.45-18.97	10	11-1/8"		5/8 x 13-1/2"		98	FC23-1780-1897-10E	
		18.90-19.20	5	6-1/8"		5/8 x 9"		73	FC23-1780-1920-05E	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		85	FC23-1780-1920-07E	
		18.90-19.20	10	11-1/8"		5/8 x 13-1/2"		99	FC23-1780-1920-10E	
	18.45-18.97	18.45-18.97	5	6-1/8"	10	5/8 x 9"		72	FC23-1897-1897-05E	
		18.45-18.97	7	8-1/8"		5/8" x 10-1/2"		84	FC23-1897-1897-07E	
		18.45-18.97	10	11-1/8"		5/8 x 13-1/2"		98	FC23-1897-1897-10E	
		18.90-19.20	5	6-1/8"		5/8 x 9"		71	FC23-1897-1920-05E	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		84	FC23-1897-1920-07E	
		18.90-19.20	10	11-1/8"		5/8 x 13-1/2"		98	FC23-1897-1920-10E	
	18.90-19.20	18.90-19.20	5	6-1/8"	10	5/8 x 9"		71	FC23-1920-1920-05E	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		83	FC23-1920-1920-07E	
		18.90-19.20	10	11-1/8"		5/8 x 13-1/2"		97	FC23-1920-1920-10E	
18"	19.50-20.00	19.50-20.00	7	8-1/8"	11	5/8" x 10-1/2"	24-1/2"	88	FC23-2000-2000-07E	
			10	11-1/8"		5/8 x 13-1/2"		103	FC23-2000-2000-10E	
20"	21.60-22.06	21.60-22.06	7	8-1/8"	12	5/8" x 10-1/2"	26-13/16"	99	FC23-2206-2206-07E	
			10	11-1/8"		5/8 x 13-1/2"		119	FC23-2206-2206-10E	
24"	25.80-26.32	25.80-26.32	7	8-1/8"	14	5/8" x 10-1/2"	31-1/8"	168	FC23-2632-2632-07E	
			10	11-1/8"		5/8 x 13-1/2"		185	FC23-2632-2632-10E	

FEATURES

- Sleeve: ASTM A36 carbon steel
- End Ring: Ductile iron per ASTM A536. Color coded to match gasket.
- Gasket: SBR molded rubber: embossed with size and end ring color code. Optional NBR (Buna-N) or EPDM
- Bolts & Nuts: High strength low alloy steel per ASTM A242 & AWWA C-111.
Optional: Types 304 & 316 stainless or electro galvanized.
- Finish: Fusion bonded epoxy.
- 200 PSI - Rated working pressure
- NSF 61 Approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/26/18

Submitted By: