



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxxx-xxxx-xxR-U style)



16"-24" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S

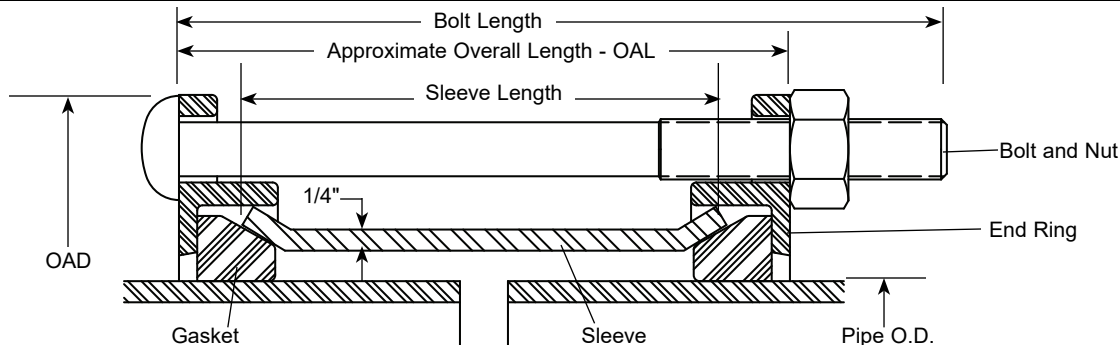

NOM. PIPE SIZE	1ST END GASKET RANGE	2ND END GASKET RANGE	CENTER SLEEVE		No.	Bolts SIZE	OAD	APPROX WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			LENGTH	APPROX. OAL						
16"	17.40-17.80	17.40-17.80	5	6-1/8"	10	5/8" x 9"	23-5/16"	76	FC23-1780-1780-05R-U	
		17.40-17.80	7	8-1/8"		5/8" x 10-1/2"		88	FC23-1780-1780-07R-U	
		17.40-17.80	10	11-1/8"		5/8" x 13-1/2"		102	FC23-1780-1780-10R-U	
		18.45-18.97	5	6-1/8"		5/8" x 9"		71	FC23-1780-1897-05R-U	
		18.45-18.97	7	8-1/8"		5/8" x 10-1/2"		83	FC23-1780-1897-07R-U	
		18.45-18.97	10	11-1/8"		5/8" x 13-1/2"		98	FC23-1780-1897-10R-U	
		18.90-19.20	5	6-1/8"		5/8" x 9"		73	FC23-1780-1920-05R-U	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		85	FC23-1780-1920-07R-U	
		18.90-19.20	10	11-1/8"		5/8" x 13-1/2"		99	FC23-1780-1920-10R-U	
	18.45-18.97	18.45-18.97	5	6-1/8"	10	5/8" x 9"	23-5/16"	72	FC23-1897-1897-05R-U	
		18.45-18.97	7	8-1/8"		5/8" x 10-1/2"		84	FC23-1897-1897-07R-U	
		18.45-18.97	10	11-1/8"		5/8" x 13-1/2"		98	FC23-1897-1897-10R-U	
		18.90-19.20	5	6-1/8"		5/8" x 9"		71	FC23-1897-1920-05R-U	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		84	FC23-1897-1920-07R-U	
		18.90-19.20	10	11-1/8"		5/8" x 13-1/2"		98	FC23-1897-1920-10R-U	
	18.90-19.20	18.90-19.20	5	6-1/8"	10	5/8" x 9"	23-5/16"	71	FC23-1920-1920-05R-U	
		18.90-19.20	7	8-1/8"		5/8" x 10-1/2"		83	FC23-1920-1920-07R-U	
		18.90-19.20	10	11-1/8"		5/8" x 13-1/2"		97	FC23-1920-1920-10R-U	
18"	19.50-20.00	19.50-20.00	7	8-1/8"	11	5/8" x 10-1/2"	24-1/2"	88	FC23-2000-2000-07R-U	
			10	11-1/8"		5/8" x 13-1/2"		103	FC23-2000-2000-10R-U	
20"	21.60-22.06	21.60-22.06	7	8-1/8"	12	5/8" x 10-1/2"	26-13/16"	99	FC23-2206-2206-07R-U	
			10	11-1/8"		5/8" x 13-1/2"		119	FC23-2206-2206-10R-U	
24"	25.80-26.32	25.80-26.32	7	8-1/8"	14	5/8" x 10-1/2"	31-1/8"	168	FC23-2632-2632-07R-U	
			10	11-1/8"		5/8" x 13-1/2"		185	FC23-2632-2632-10R-U	

FEATURES

- Sleeve: ASTM A36 carbon steel
- End Ring: Ductile iron per ASTM A536. Color coded to match gasket
- Gasket: SBR Molded Rubber: embossed with size and end ring color code. Optional NBR (Buna-N) or EPDM
- Bolts & Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
Optional: Types 304 & 316 stainless or electro galvanized
- Finish: Black shop coat with color coded end rings. Optional fusion bonded epoxy
- 16"-18" rated for 200 psi, 20"-24" rated for 150 psi
- NSF 61 Approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

09/24/18

Submitted By: