



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxxx-xxxx-xxZ style)



12" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE

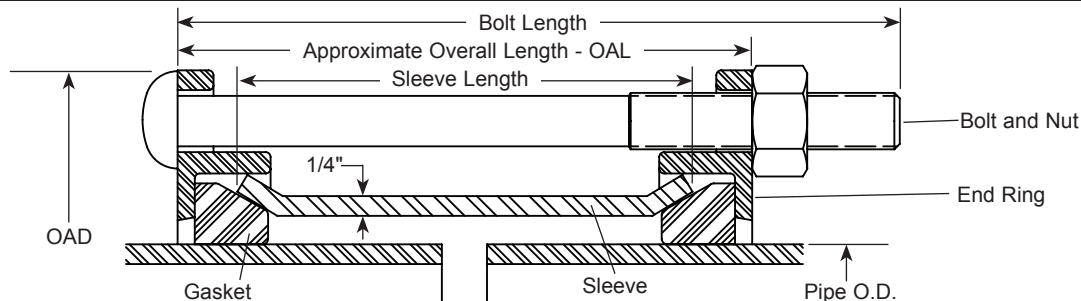

NOM. PIPE SIZE	GASKET RANGE		CENTER SLEEVE		No.	BOLTS		OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓SUBMITTED ITEM(S)
	1ST END (IN.)	2ND END (IN.)	LENGTH	APPROX. OAL		DIA.	LENGTH				
12"	12.75	12.75	5"	6-1/8"	7	5/8"	9"	18"	41	FC23-1275-1275-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1275-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1275-10Z	
			16"	17-1/8"			20"		74	FC23-1275-1275-16Z	
		13.20-13.50	5"	6-1/8"			9"		41	FC23-1275-1350-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1350-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1350-10Z	
			16"	17-1/8"			20"		74	FC23-1275-1350-16Z	
		13.69-14.04	5"	6-1/8"			9"		41	FC23-1275-1404-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1404-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1404-10Z	
			16"	17-1/8"			20"		74	FC23-1275-1404-16Z	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1275-1438-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1275-1438-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1275-1438-10Z	
			16"	17-1/8"			20"		74	FC23-1275-1438-16Z	
	13.20-13.50	13.20-13.50	5"	6-1/8"			9"		41	FC23-1350-1350-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1350-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1350-10Z	
			16"	17-1/8"			20"		74	FC23-1350-1350-16Z	
		13.69-14.04	5"	6-1/8"			9"		41	FC23-1350-1404-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1404-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1404-10Z	
			16"	17-1/8"			20"		74	FC23-1350-1404-16Z	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1350-1438-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1350-1438-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1350-1438-10Z	
			16"	17-1/8"			20"		74	FC23-1350-1438-16Z	
	13.69-14.04	13.69-14.04	5"	6-1/8"			9"		41	FC23-1404-1404-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1404-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1404-10Z	
			16"	17-1/8"			20"		74	FC23-1404-1404-16Z	
		14.03-14.38	5"	6-1/8"			9"		41	FC23-1404-1438-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1404-1438-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1404-1438-10Z	
			16"	17-1/8"			20"		74	FC23-1404-1438-16Z	
	14.03-14.38	14.03-14.38	5"	6-1/8"			9"		41	FC23-1438-1438-05Z	
			7"	8-1/8"			10-1/2"		49	FC23-1438-1438-07Z	
			10"	11-1/8"			13-1/2"		64	FC23-1438-1438-10Z	
			16"	17-1/8"			20"		74	FC23-1438-1438-16Z	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve/Middle Ring - ASTM A36 carbon steel (Wall thickness given in table above)
- End Ring - Ductile Iron per ASTM A536. Color coded to match gasket
- Gasket - SBR Molded Rubber: embossed with size and end ring color code. Optional NBR (Buna-N) or EPDM
- Bolts & Nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Epoxy coating
- 200 PSI rated working pressure
- Certified to ANSI/NSF 61
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/29/22

Submitted By: