



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxx-xxx-B-U100 style)



4", 6" & 8" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S WITH TYPE 304 STAINLESS STEEL HARDWARE, EPOXY COATING AND EPDM GASKET

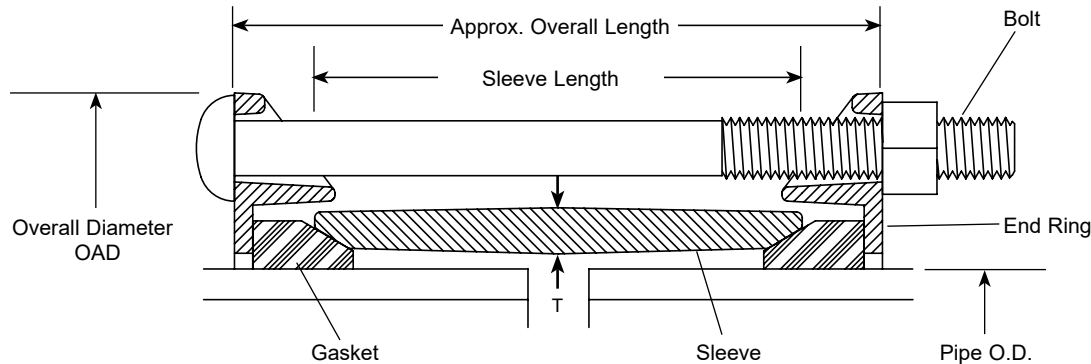

NOM. PIPE SIZE	GASKET RANGE 1ST HALF		END RING	BY	GASKET RANGE 2ND HALF		END RING	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	(IN.)	CAT. #			(IN.)	CAT. #		LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.				
4"	4.00	Red			4.00	Red		5"	3/8"	5/8"	8"	3	6-1/8"	8-7/8"	16	FC2A-400-400-B-U100
	4.00	Red			4.50	Red										FC2A-400-450-B-U100
	4.00	Red			4.80 - 5.14	Blk										FC2A-400-514-B-U100
	4.50	Red			4.50	Red										FC2A-450-450-B-U100
	4.50	Red			4.80 - 5.14	Blk										FC2A-450-514-B-U100
	4.50	Red			5.15 - 5.57	Wht/Gry										FC2A-450-557-B-U100
	4.80 - 5.14	Blk			4.80 - 5.14	Blk										FC2A-514-514-B-U100
	4.80 - 5.14	Blk			5.15 - 5.57	Wht/Gry										FC2A-514-557-B-U100
	5.15 - 5.57	Wht/Gry			5.15 - 5.57	Wht/Gry										FC2A-557-557-B-U100
																FC2A-557-557-B-U100
6"	6.00	Red			6.00	Red		5"	3/8"	5/8"	8"	4	6-1/8"	10-15/16"	24	FC2A-600-600-B-U100
	6.63	Red			6.63	Red										FC2A-600-663-B-U100
	6.63	Red			6.90 - 7.20	Blk										FC2A-663-663-B-U100
	6.63	Red			7.21 - 7.56	Wht/Gry										FC2A-663-720-B-U100
	6.90 - 7.20	Blk			6.90 - 7.20	Blk										FC2A-663-756-B-U100
	6.90 - 7.20	Blk			7.21 - 7.56	Wht/Gry										FC2A-720-720-B-U100
	7.21 - 7.56	Wht/Gry			7.21 - 7.56	Wht/Gry										FC2A-720-756-B-U100
																FC2A-756-756-B-U100
8"	8.00	Red			8.00	Red		5"	7/16"	5/8"	8"	5	6-1/8"	13-3/16"	34	FC2A-800-800-B-U100
	8.63	Red			8.63	Red										FC2A-800-863-B-U100
	8.63	Red			9.05 - 9.40	Blk										FC2A-863-863-B-U100
	8.63	Red			9.40 - 9.74	Wht/Gry										FC2A-863-940-B-U100
	9.05 - 9.40	Blk			9.40 - 9.74	Wht/Gry										FC2A-863-974-B-U100
	9.05 - 9.40	Blk			9.05 - 9.40	Blk										FC2A-940-940-B-U100
	9.05 - 9.40	Blk			9.40 - 9.74	Wht/Gry										FC2A-940-974-B-U100
	9.40 - 9.74	Wht/Gry			9.40 - 9.74	Wht/Gry										FC2A-974-974-B-U100

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12)
- End Rings - Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Finish - Fusion bonded epoxy coating
- Gasket - Molded EPDM rubber per ASTM D2000
- Certified to ANSI/NSF 61
- Complies with AWWA C219
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/07/22

Submitted By: