



SUBMITTAL INFORMATION

Ductile Iron Extended Length Transition Coupling - (FC2A-xxx-xxx-L12-E style)



4", 6" & 8" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

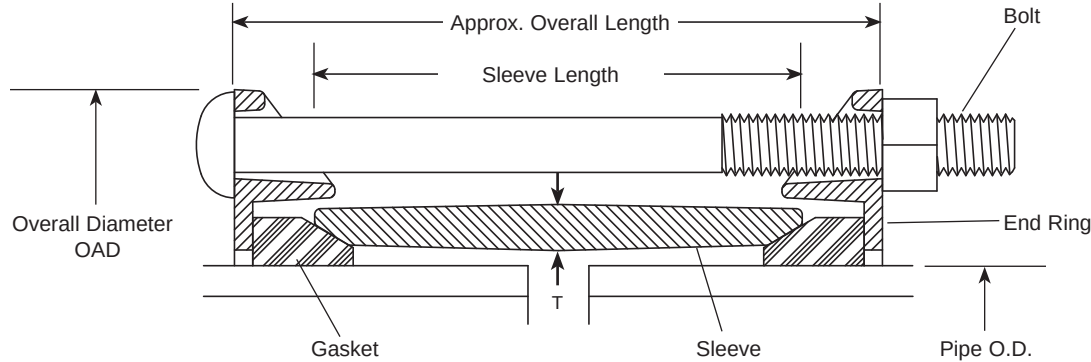

NOM. PIPE SIZE	GASKET RANGE		END RING COLOR	BY	GASKET RANGE		END RING COLOR	CENTER SLEEVE LGTH.	APPROX. (T) THICKNESS		DIA.	LGTH.	QTY.	APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	1ST HALF CAT. #	2ND HALF CAT. #			1ST HALF CAT. #	2ND HALF CAT. #												
4"	4.00	4.00	Red	X	4.00	4.00	Red	12"	3/8"	5/8"	15-1/2"	3	13-1/8"	8-7/8"	34		FC2A-400-400-L12-E	
	4.00	4.50	Red		4.50	4.50	Red										FC2A-400-450-L12-E	
	4.00	4.80 - 5.14	Red		4.80 - 5.14	4.80 - 5.14	Blk										FC2A-400-514-L12-E	
	4.50	4.50	Red		4.50	4.50	Red										FC2A-450-450-L12-E	
	4.50	4.80 - 5.14	Red		4.80 - 5.14	4.80 - 5.14	Blk										FC2A-450-514-L12-E	
	4.50	5.15 - 5.57	Red		5.15 - 5.57	5.15 - 5.57	Wht/Gry										FC2A-450-557-L12-E	
	4.80 - 5.14	4.80 - 5.14	Blk		4.80 - 5.14	4.80 - 5.14	Blk										FC2A-514-514-L12-E	
	4.80 - 5.14	5.15 - 5.57	Blk		5.15 - 5.57	5.15 - 5.57	Wht/Gry										FC2A-514-557-L12-E	
	5.15 - 5.57	5.15 - 5.57	Wht/Gry		5.15 - 5.57	5.15 - 5.57	Wht/Gry										FC2A-557-557-L12-E	
6"	6.00	6.00	Red	X	6.00	6.00	Red	12"	3/8"	5/8"	15-1/2"	4	13-1/8"	10-15/16"	48		FC2A-600-600-L12-E	
	6.63	6.63	Red		6.63	6.63	Red										FC2A-663-663-L12-E	
	6.63	6.90 - 7.20	Red		6.90 - 7.20	6.90 - 7.20	Blk										FC2A-663-720-L12-E	
	6.63	7.21 - 7.56	Red		7.21 - 7.56	7.21 - 7.56	Wht/Gry										FC2A-663-756-L12-E	
	6.90 - 7.20	6.90 - 7.20	Blk		6.90 - 7.20	6.90 - 7.20	Blk										FC2A-720-720-L12-E	
	6.90 - 7.20	7.21 - 7.56	Blk		7.21 - 7.56	7.21 - 7.56	Wht/Gry										FC2A-720-756-L12-E	
	7.21 - 7.56	7.21 - 7.56	Wht/Gry		7.21 - 7.56	7.21 - 7.56	Wht/Gry										FC2A-756-756-L12-E	
8"	8.00	8.00	Red	X	8.00	8.00	Red	12"	7/16"	5/8"	15-1/2"	5	13-1/8"	13-3/16"	63		FC2A-800-800-L12-E	
	8.63	8.63	Red		8.63	8.63	Red										FC2A-863-863-L12-E	
	8.63	9.05 - 9.40	Red		9.05 - 9.40	9.05 - 9.40	Blk										FC2A-863-940-L12-E	
	8.63	9.40 - 9.74	Red		9.40 - 9.74	9.40 - 9.74	Wht/Gry										FC2A-863-974-L12-E	
	9.05 - 9.40	9.05 - 9.40	Blk		9.05 - 9.40	9.05 - 9.40	Blk										FC2A-940-940-L12-E	
	9.05 - 9.40	9.40 - 9.74	Blk		9.40 - 9.74	9.40 - 9.74	Wht/Gry										FC2A-940-974-L12-E	
	9.40 - 9.74	9.40 - 9.74	Wht/Gry		9.40 - 9.74	9.40 - 9.74	Wht/Gry										FC2A-974-974-L12-E	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Fusion bonded epoxy, applied per AWWA C213
- Gasket: Molded SBR Rubber per ASTM D2000, M4AA810
- NSF61: NSF 61 Approved
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

01/19/15

Submitted By: