



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-BBN style)



FC2A COUPLING FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

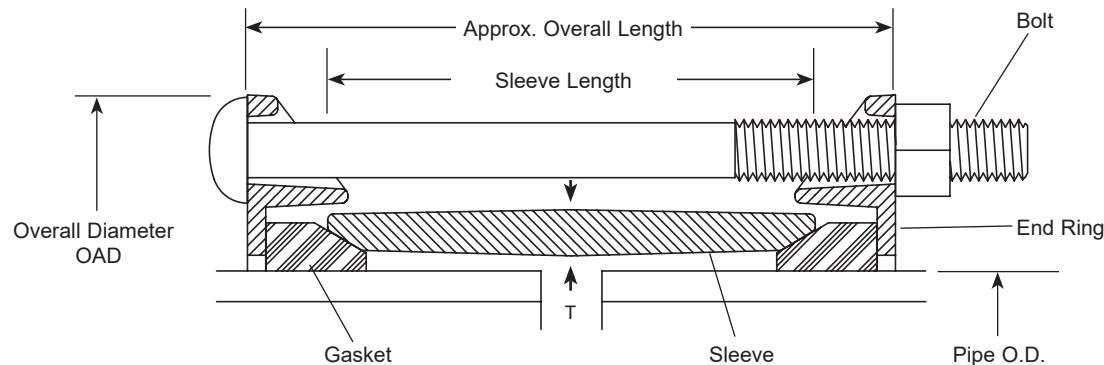

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	By	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓SUBMITTED ITEM(S)
						LGTH.	APPROX. (T)THICKNESS	DIA.	LGTH.	QTY.					
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	FC2A-1570-1570-BBN	
	15.30 - 15.70	Blk		16.00 - 16.35	Red									FC2A-1570-1635-BBN	
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry									FC2A-1570-1688-BBN	
	16.00 - 16.35	Red		16.00 - 16.35	Red									FC2A-1635-1635-BBN	
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry									FC2A-1635-1688-BBN	
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry									FC2A-1688-1688-BBN	
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	7"	1/2"	5/8"	10-1/2"	10	8-1/8"	23-5/16"	91	FC2A-1780-1780-BBN	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry									FC2A-1780-1897-BBN	
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry									FC2A-1780-1920-BBN	
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry									FC2A-1897-1897-BBN	
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1897-1920-BBN	
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1920-1920-BBN	
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	FC2A-2000-2000-BBN	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	FC2A-2206-2206-BBN	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	FC2A-2632-2632-BBN	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12) or carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - Blue fluorocarbon coated, high strength, low alloy steel per ASTM A242 or AWWA C111
- Finish - Shop coat
- Gasket - SBR rubber per ASTM D2000
- Certified to NSF/ANSI 61
- Complies with AWWA C219
- 150 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

02/29/24

Submitted By: