



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-EBBN style)



FC2A COUPLING FOR JOINING PIPES WITH DIFFERENT O.D.'S WITH BLUE FLUOROCARBON COATED HARDWARE

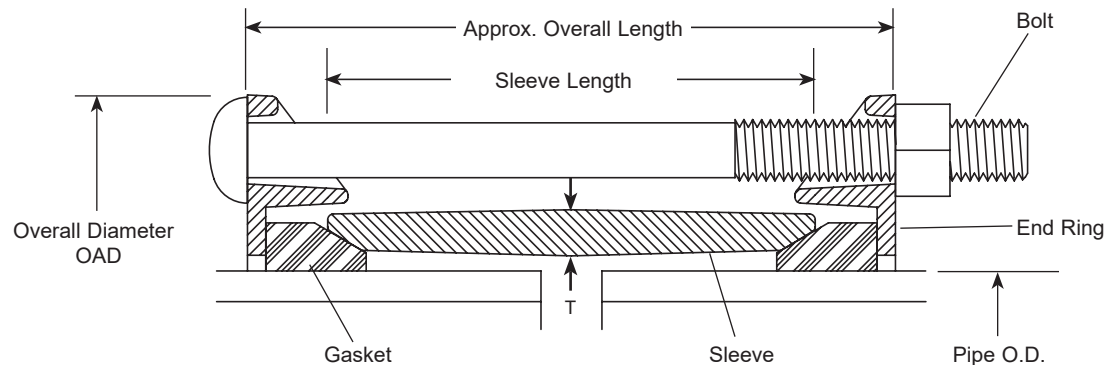

NOM. PIPE SIZE	GASKET RANGE		END RING COLOR	BY	GASKET RANGE		END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	1ST HALF (IN.)	CAT. #			2ND HALF (IN.)	CAT. #		LGTH.	APPROX. (T)THICKNESS	DIA.	LGTH.	QTY.				
14"	15.30 - 15.70	Blk	X	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	FC2A-1570-1570-EBBN	
	15.30 - 15.70	Blk			16.00 - 16.35	Red									FC2A-1570-1635-EBBN	
	15.30 - 15.70	Blk			16.40 - 16.88	Wht/Gry									FC2A-1570-1688-EBBN	
	16.00 - 16.35	Red			16.00 - 16.35	Red									FC2A-1635-1635-EBBN	
	16.00 - 16.35	Red			16.40 - 16.88	Wht/Gry									FC2A-1635-1688-EBBN	
	16.40 - 16.88	Wht/Gry			16.40 - 16.88	Wht/Gry									FC2A-1688-1688-EBBN	
16"	17.40 - 17.80	Blk	X	X	17.40 - 17.80	Blk	7"	1/2"	5/8"	10-1/2"	10	8-1/8"	23-5/16"	91	FC2A-1780-1780-EBBN	
	17.40 - 17.80	Blk			18.45 - 18.97	Wht/Gry									FC2A-1780-1897-EBBN	
	17.40 - 17.80	Blk			18.90 - 19.20	Wht/Gry									FC2A-1780-1920-EBBN	
	18.45 - 18.97	Wht/Gry			18.45 - 18.97	Wht/Gry									FC2A-1897-1897-EBBN	
	18.45 - 18.97	Wht/Gry			18.90 - 19.20	Wht/Gry									FC2A-1897-1920-EBBN	
	18.90 - 19.20	Wht/Gry			18.90 - 19.20	Wht/Gry									FC2A-1920-1920-EBBN	
18"	19.50 - 20.00	Blk	X	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	FC2A-2000-2000-EBBN	
20"	21.60 - 22.06	Blk	X	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	FC2A-2206-2206-EBBN	
24"	25.80 - 26.32	Blk	X	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	FC2A-2632-2632-EBBN	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12) or carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - High strength, low alloy steel per ASTM A242 or AWWA C111 with blue fluorocarbon coating
- Finish - Fusion bonded epoxy. Applied per AWWA C213
- Gasket - SBR rubber per ASTM D2000
- Complies with AWWA C219
- Certified to NSF/ANSI 61
- 150 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/01/24

Submitted By: