



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-K style)



10" & 12" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

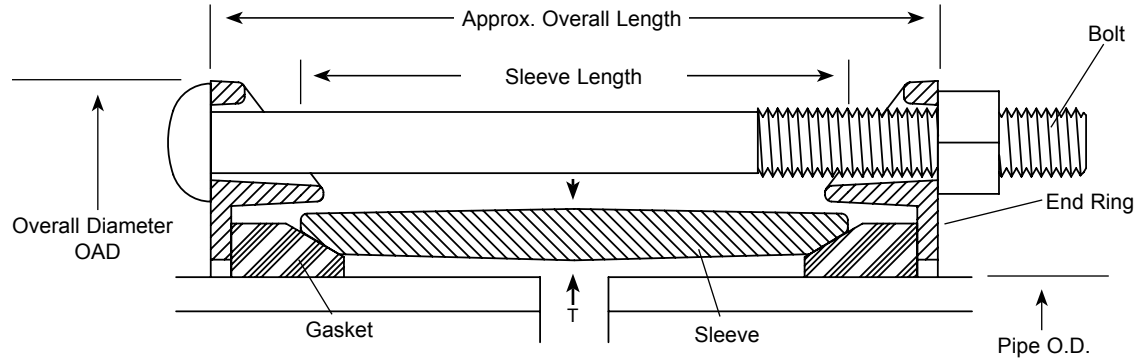

NOM. PIPE SIZE	GASKET RANGE		END RING COLOR	BY	GASKET RANGE		END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	1ST HALF (IN.)	CAT. #			2ND HALF (IN.)	CAT. #		LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.				
10"	10.00		Red	X	10.75		Red	6"	7/16"	5/8"	9"	6	7-1/8"	15-11/16"	48	FC2A-1000-1075-K
	10.75		Red		10.75		Red									FC2A-1075-1075-K
	10.75		Red		11.10 - 11.40		Blk									FC2A-1075-1140-K
	10.75		Red		11.42 - 11.77		Blk									FC2A-1075-1177-K
	10.75		Red		11.77 - 12.12		Wht/Gry									FC2A-1075-1212-K
	11.10 - 11.40		Blk		11.10 - 11.40		Blk									FC2A-1140-1140-K
	11.10 - 11.40		Blk		11.42 - 11.77		Blk									FC2A-1140-1177-K
	11.10 - 11.40		Blk		11.77 - 12.12		Wht/Gry									FC2A-1140-1212-K
	11.42 - 11.77		Blk		11.42 - 11.77		Blk									FC2A-1177-1177-K
	11.42 - 11.77		Blk		11.77 - 12.12		Wht/Gry									FC2A-1177-1212-K
	11.77 - 12.12		Wht/Gry		11.77 - 12.12		Wht/Gry									FC2A-1212-1212-K
	11.77 - 12.12		Wht/Gry		11.77 - 12.12		Wht/Gry									FC2A-1212-1212-K
12"	12.75		Blk	X	12.75		Blk	6"	1/2"	5/8"	9"	7	7-1/8"	18"	56	FC2A-1275-1275-K
	12.75		Blk		13.20 - 13.50		Blk									FC2A-1275-1350-K
	12.75		Blk		13.69 - 14.04		Wht/Gry									FC2A-1275-1404-K
	12.75		Blk		14.03 - 14.38		Wht/Gry									FC2A-1275-1438-K
	13.20 - 13.50		Blk		13.20 - 13.50		Blk									FC2A-1350-1350-K
	13.20 - 13.50		Blk		13.69 - 14.04		Wht/Gry									FC2A-1350-1404-K
	13.20 - 13.50		Blk		14.03 - 14.38		Wht/Gry									FC2A-1350-1438-K
	13.69 - 14.04		Wht/Gry		13.69 - 14.04		Wht/Gry									FC2A-1404-1404-K
	13.69 - 14.04		Wht/Gry		14.03 - 14.38		Wht/Gry									FC2A-1404-1438-K
	14.03 - 14.38		Wht/Gry		14.03 - 14.38		Wht/Gry									FC2A-1438-1438-K
	14.03 - 14.38		Wht/Gry		14.03 - 14.38		Wht/Gry									FC2A-1438-1438-K
	14.03 - 14.38		Wht/Gry		14.03 - 14.38		Wht/Gry									FC2A-1438-1438-K

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile iron per ASTM A536 (65-45-12)
- End Rings: Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111, electro galvanized
- Coating: Black epoxy coat
- Gasket: Molded SBR Rubber per ASTM D2000
- Certified to NSF/ANSI 61
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/15/20

Submitted By: