



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-Y-U style)



FC2A COUPLING FOR JOINING PIPES WITH DIFFERENT O.D.'S WITH 304 STAINLESS STEEL HARDWARE AND EPOXY COATING

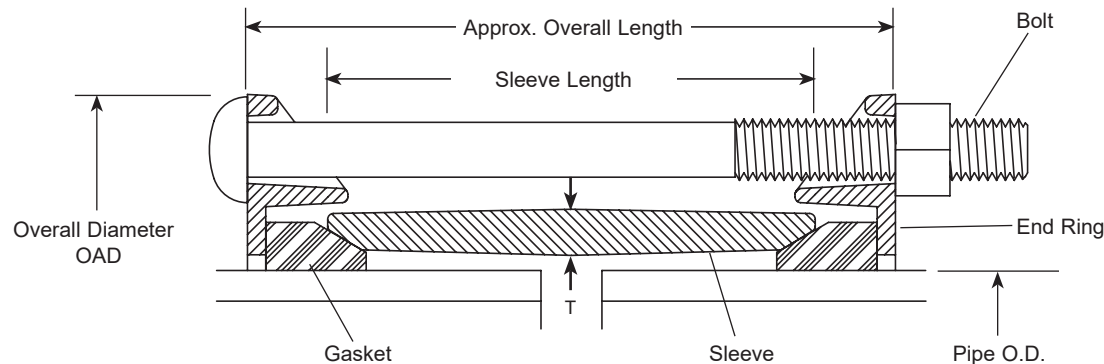

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. # (IN.)	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. # (IN.)	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.					
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	FC2A-1570-1570-Y-U	
	15.30 - 15.70	Blk		16.00 - 16.35	Red									FC2A-1570-1635-Y-U	
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry									FC2A-1570-1688-Y-U	
	16.00 - 16.35	Red		16.00 - 16.35	Red									FC2A-1635-1635-Y-U	
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry									FC2A-1635-1688-Y-U	
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry									FC2A-1688-1688-Y-U	
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	7"	1/2"	5/8"	10-1/2"	10	8-1/8"	23-5/16"	91	FC2A-1780-1780-Y-U	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry									FC2A-1780-1897-Y-U	
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry									FC2A-1780-1920-Y-U	
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry									FC2A-1897-1897-Y-U	
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1897-1920-Y-U	
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry									FC2A-1920-1920-Y-U	
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	FC2A-2000-2000-Y-U	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	FC2A-2206-2206-Y-U	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	FC2A-2632-2632-Y-U	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Ductile iron per ASTM A536 (65-45-12) or carbon steel per ASTM A36
- End Rings - Ductile iron per ASTM A536 (65-45-12)
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Finish - Fusion bonded epoxy. Applied per AWWA C213
- Certified to NSF/ANSI 61
- Gasket - SBR Rubber per ASTM D2000
- Complies with AWWA C219
- 150 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/01/24

Submitted By: